



Supakwik Water Heaters Pty Ltd

Product Catalogue


Boiling and chilled filtered water solutions
for commercial & domestic applications

Supatap
Underbench Series



Supaboil and Kwikboil
Overbench Series

Supakwik leads the industry in bringing you Patented
Motion Detection Power
Saving Technology





Product Index

UNDERBENCH RANGE - SUPATAP

Code	Model	Description	Page
BF100	Supatap	Filtered - Boil 100 Cup / Ambient	04
BF120	Supatap	Filtered - Boil 120 Cup / Ambient	05
BF170	Supatap	Filtered - Boil 170 Cup / Ambient	06
BF200	Supatap	Filtered - Boil 200 Cup / Ambient	07
BC100/60	Supatap	Filtered - Boil 100 Cup / Chill 60 Cup	08
BC120/60	Supatap	Filtered - Boil 120 Cup / Chill 60 Cup	09
BC170/60	Supatap	Filtered - Boil 170 Cup / Chill 60 Cup	10
BC200/60	Supatap	Filtered - Boil 200 Cup / Chill 60 Cup	11
BCF170/60	Supatap	Filtered - Boil 170 Cup / Chill 60 Cup / Ambient	12
BCF200/60	Supatap	Filtered - Boil 200 Cup / Chill 60 Cup / Ambient	13

OVERBENCH RANGE - Motion Detection

Code	Model	Description	Nominal Capacity	Page
MA020	Supaboil	20 Cup	3 Litre	14
MA038	Supaboil	38 Cup	6 Litre	15
MA050	Supaboil	50 Cup	8 Litre	16
MA020F	Supaboil	20 Cup - Filtered	3 Litre	17
MA038F	Supaboil	38 Cup - Filtered	6 Litre	18
MA050F	Supaboil	50 Cup - Filtered	8 Litre	19

OVERBENCH RANGE - Standard

Code	Model	Description	Nominal Capacity	Page
SA020	Kwikboil	20 Cup	3 Litre	20
SA038	Kwikboil	38 Cup	6 Litre	21
SA050	Kwikboil	50 Cup	8 Litre	22
SA100	Kwikboil	100 Cup	16 Litre	23
SA160	Kwikboil	160 Cup	25 Litre	24
SA020F	Kwikboil	20 Cup - Filtered	3 Litre	25
SA038F	Kwikboil	38 Cup - Filtered	6 Litre	26
SA050F	Kwikboil	50 Cup - Filtered	8 Litre	27
SA100F	Kwikboil	100 Cup - Filtered	16 Litre	28
SA160F	Kwikboil	160 Cup - Filtered	25 Litre	29

CHILLED WATER

Code	Model	Description	Page
UB6030K	Chiller	Under Bench - 60 glass per hour - Filter & Tap Install Kit	30
UB6030	Chiller	Under Bench - 60 glass per hour - Chiller Only	31

SUPAFLUSH Urinal Sensors

Code	Model	Description	Page
SFCBK	Supaflush	Ceiling Mount - Battery Operated - Flushing Kit	32
SFCMK	Supaflush	Ceiling Mount - Mains Operated - Flushing Kit	33
SFWBK	Supaflush	Wall Mount - Battery Operated - Flushing kit	34
SFWMK	Supakwik	Wall Mount - Mains Operated - Flushing Kit	35

AMBIENT WATER

Code	Model	Description	Page
ATGS	Supakwik	Filtered Water Kit - Goose Neck Tap	36
ATLS	Supakwik	Filtered Water Kit - Long Reach Tap	37



Product Index

TUNDISH

Code	Model	Description	Page
T18020	Supakwik	Counter Top Mounted	38
T09020	Supakwik	Wall Mounted	39

FILTRATION

Code	Description	Page
F02F	Filter Cartridge - 5 Micron - Bayonette Style	40
F02S	Filter Cartridge - ½ Micron - Bayonette Style	41
FH121202S	Filter Cartridge - ½ Micron & Head Assembly ½" BSP	42
FH121202F	Filter Cartridge - 5 Micron & Head Assembly ½" BSP	43
FH141402S	Filter Cartridge - ½ Micron & Head Assembly ¼" QC	44
FH141402F	Filter Cartridge - 5 Micron & Head Assembly ¼" QC	45

AIR BREAKS

Code	Model	Description	Page
AC1050	Supakwik	Air Break - ½" Male x 1" Male	46
AC1060	Supakwik	Air Break - ½" Male x 1¼" Male	47
AC1070	Supakwik	Air Break - ½" Male x 1½" Male	48

COUNTER TOP FONTS

Code	Model	Description	Page
CTF-GB	Supakwik	Glass Font, Black, Complete with Drain Kit	49
CTF-GW	Supakwik	Glass Font, White, Complete with Drain Kit	50
CTF-SC	Supakwik	Chrome Font, Complete with Drain Kit	51

SPARE PARTS	52
--------------------	-----------



Supatap - Motion Series

Underbench Filtered - 100 Cups


Boiling/Ambient

Product Code

BF100

Page N° **04**

BF SERIES

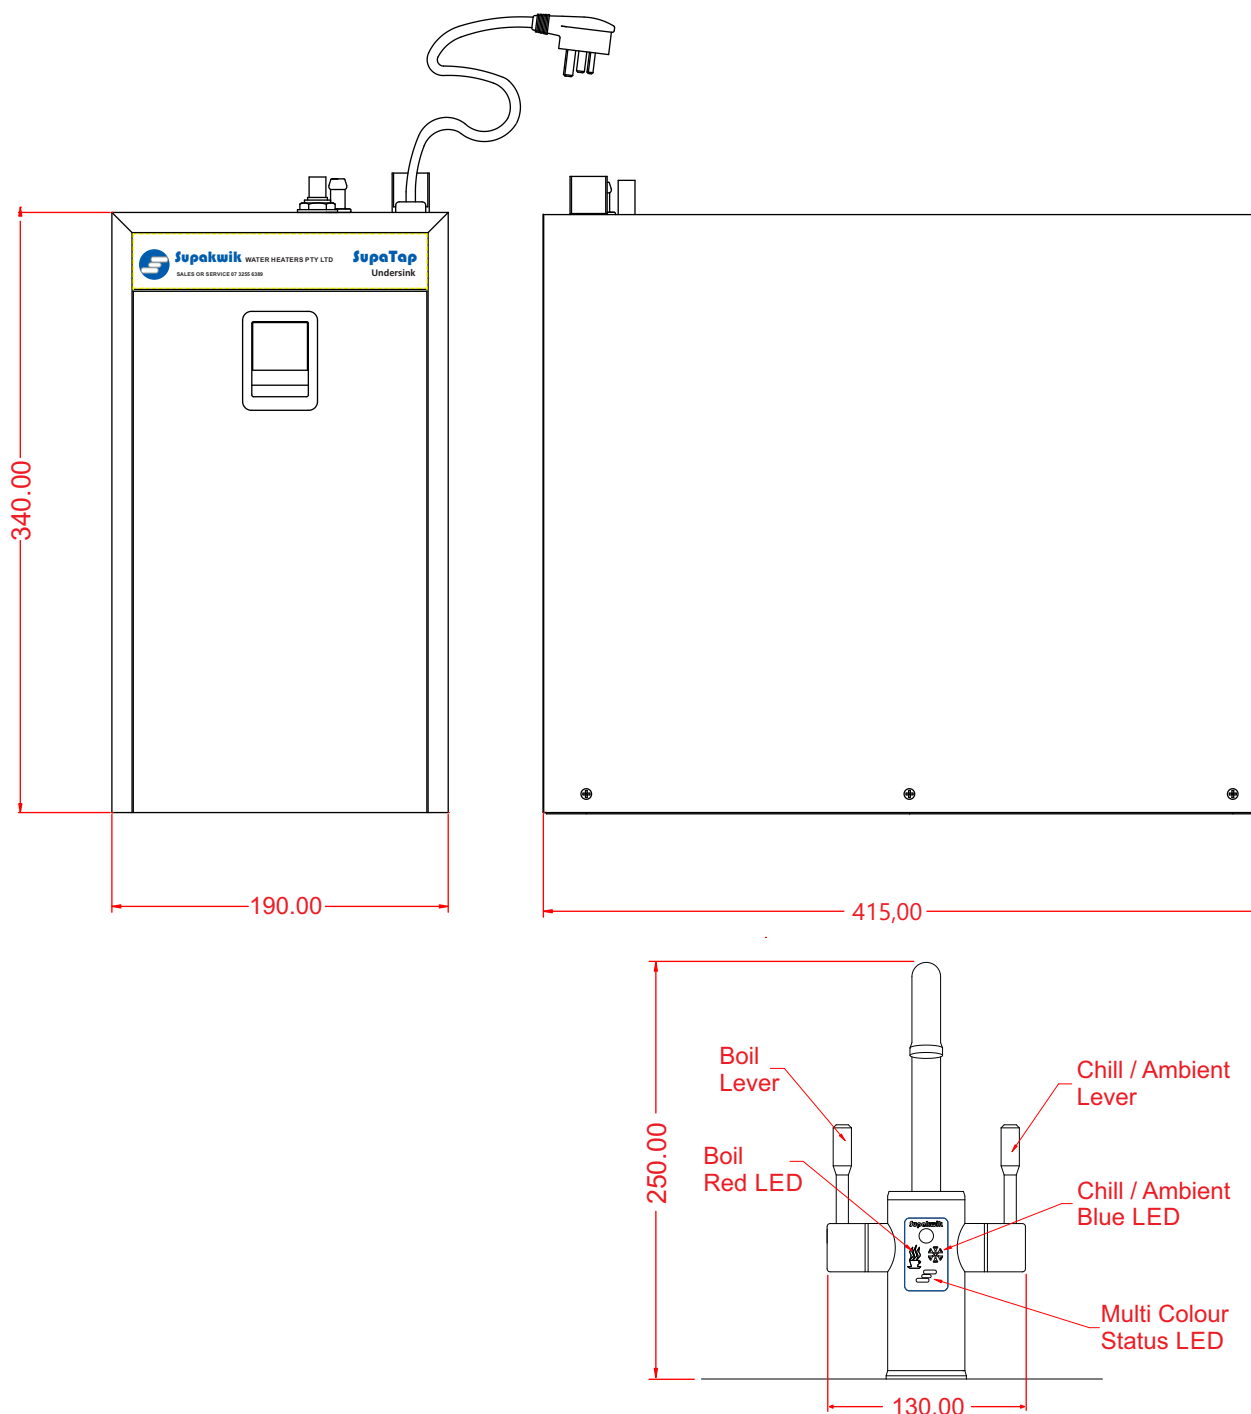

Technical Specifications

Nominal Capacity:	2,5 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	100 -1000 kPa.
Weight:	11,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Supatap - Motion Series

Underbench Filtered - 120 Cups


Boiling/Ambient

Product Code

BF120

Page N° **05**

BF SERIES

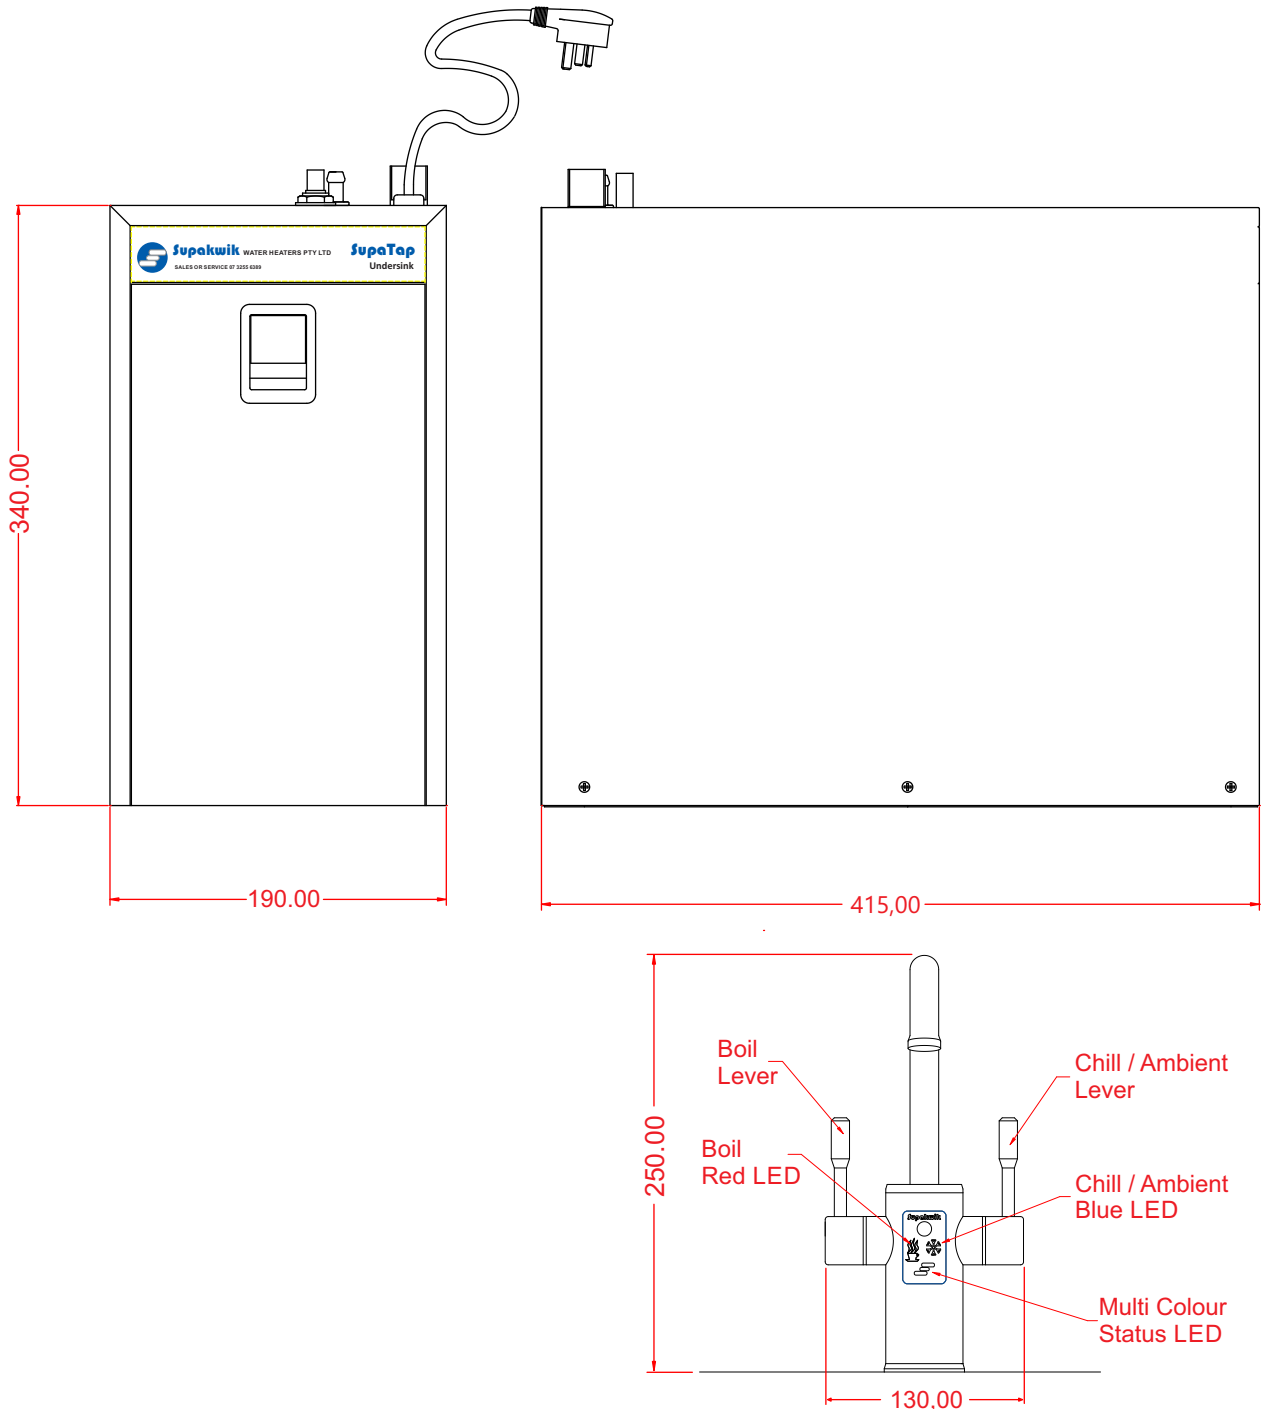

Technical Specifications

Nominal Capacity:	3,0 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	100 - 1000 kPa.
Weight:	12,0 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Supatap - Motion Series

Underbench Filtered - 170 Cups


Boiling/Ambient

Product Code

BF170

Page N° 06

BF SERIES

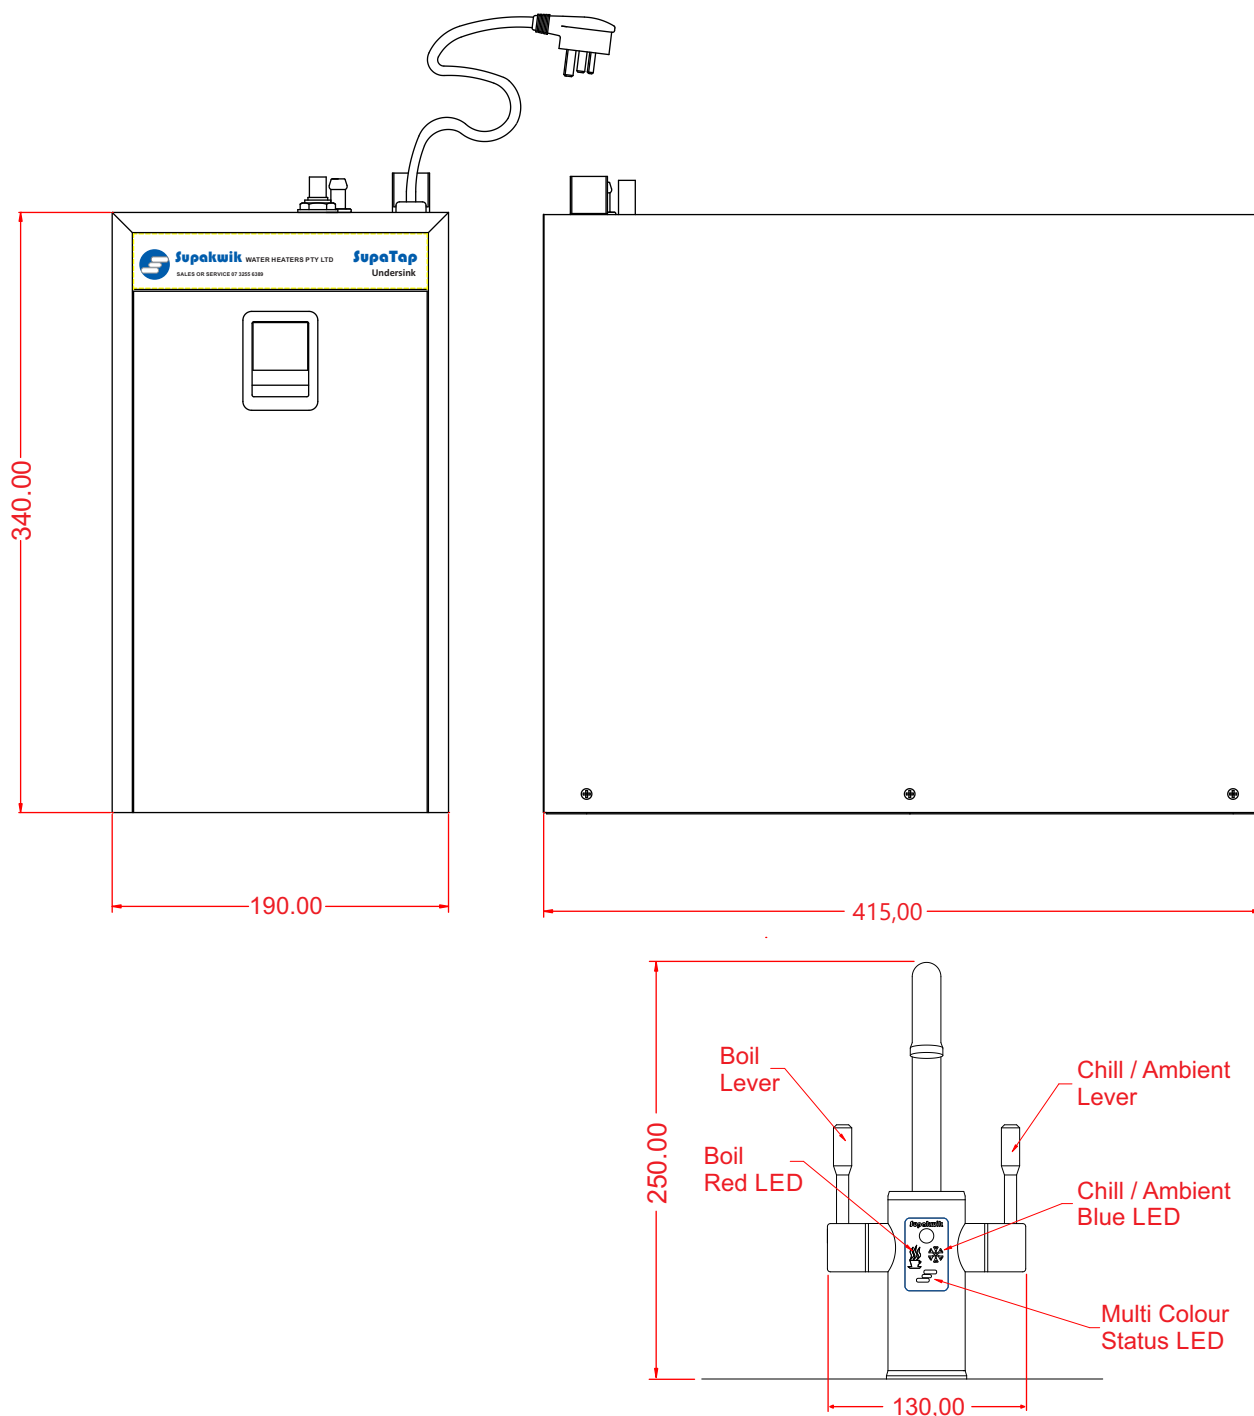

Technical Specifications

Nominal Capacity:	4,0 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	100 - 1000 kPa.
Weight:	12,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Supatap - Motion Series

Underbench Filtered - 200 Cups


Boiling/Ambient

Product Code

BF200

Page N° **07**

BF SERIES

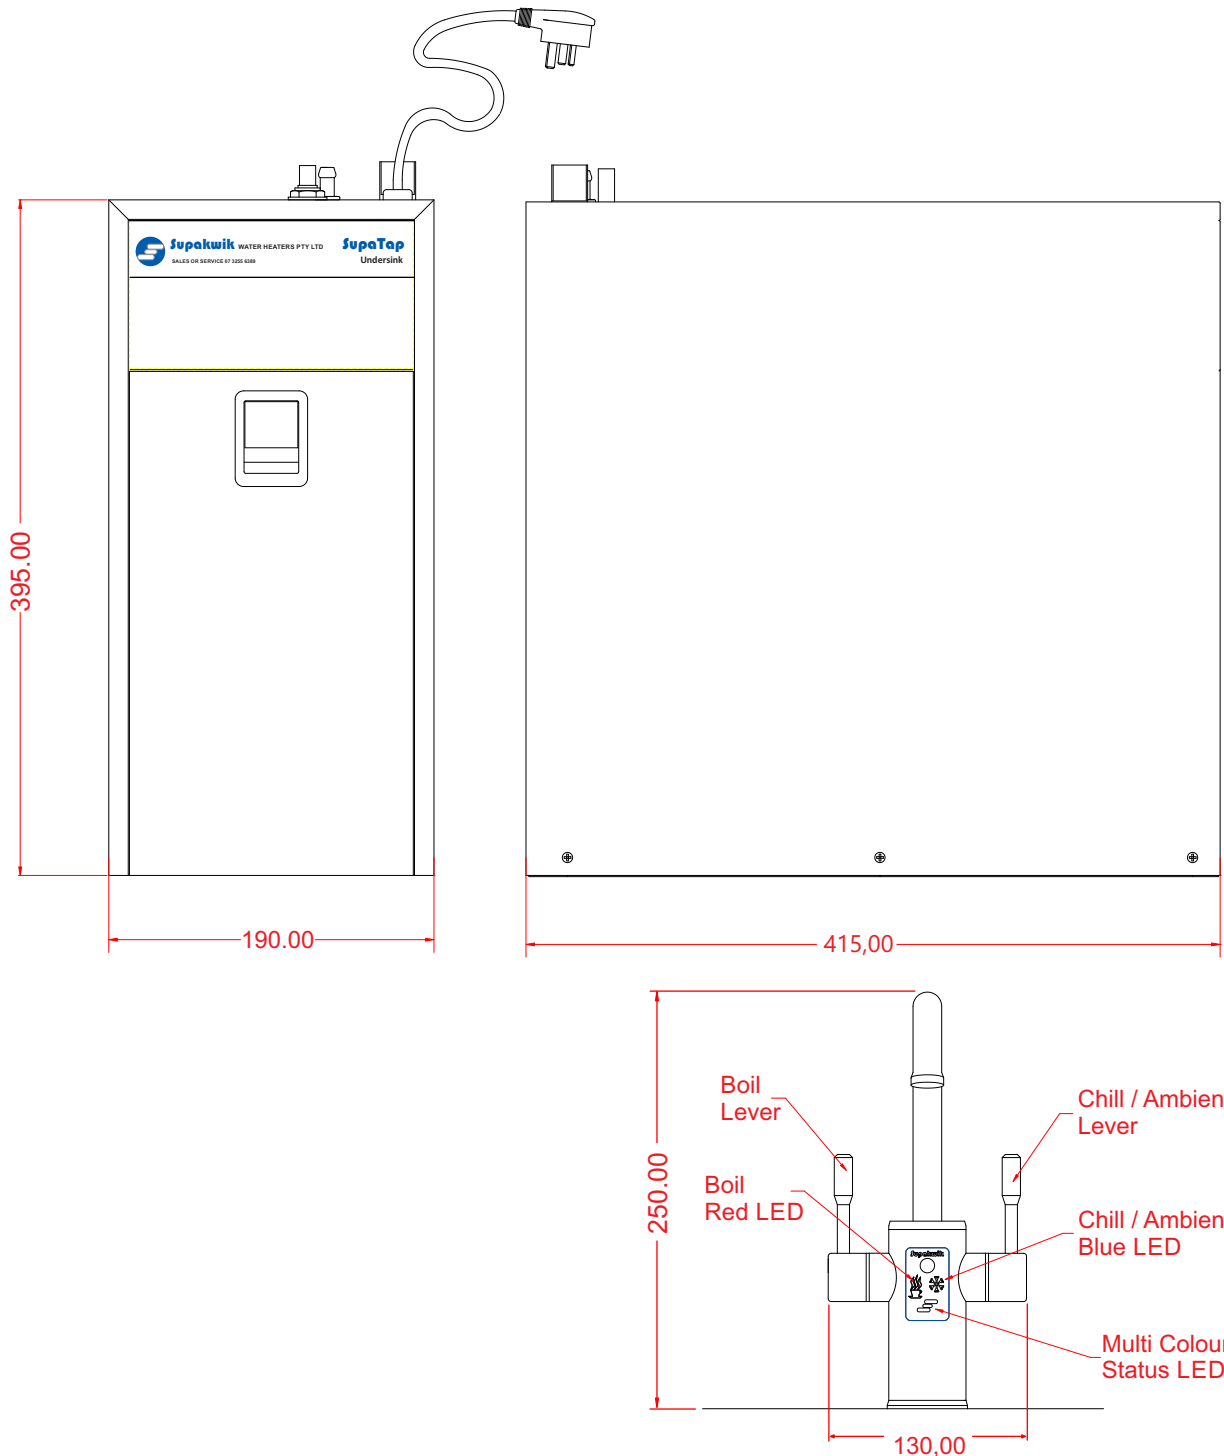

Technical Specifications

Nominal Capacity:	6,0 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	100 -1000 kPa.
Weight:	13,0 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Supatap - Motion Series


Underbench Filtered
100 Cups Boil - 8L Chilled

Product Code



BC100/60

Page N° 08


BC SERIES

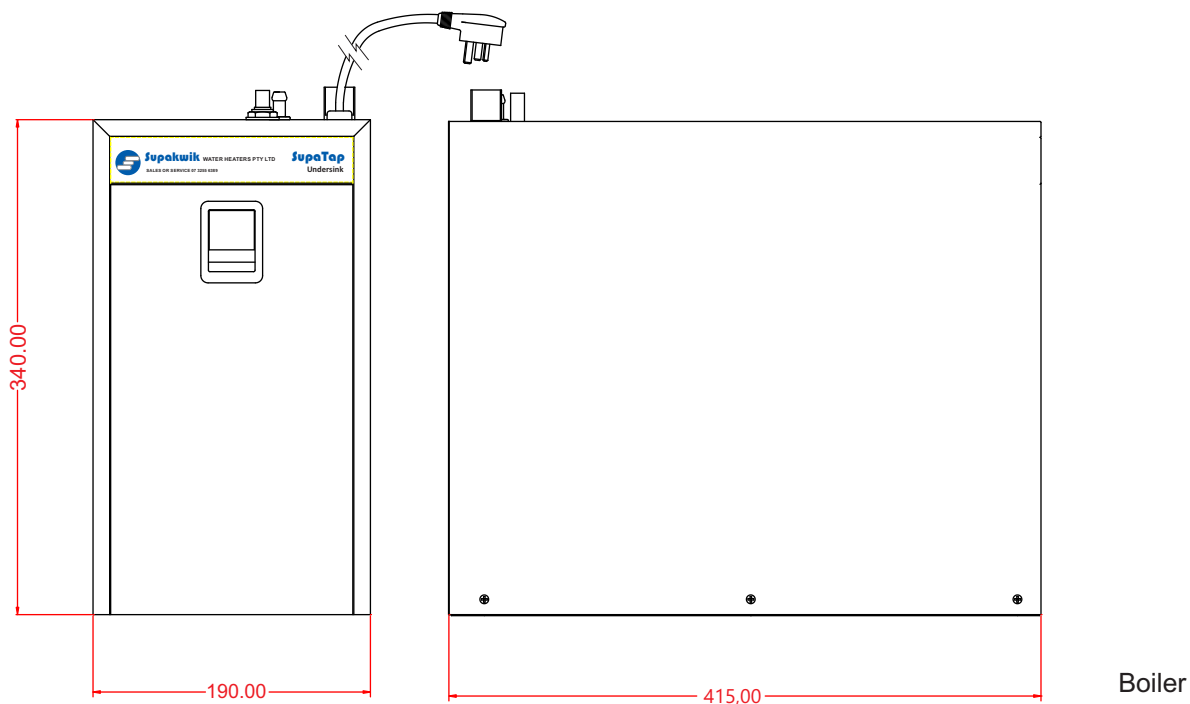

Boiler

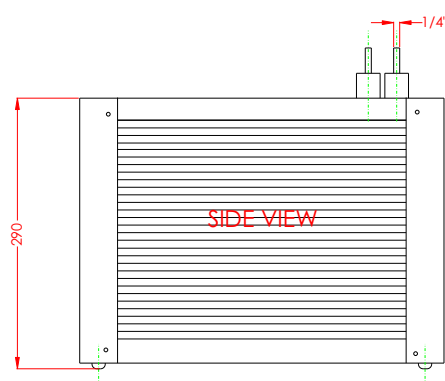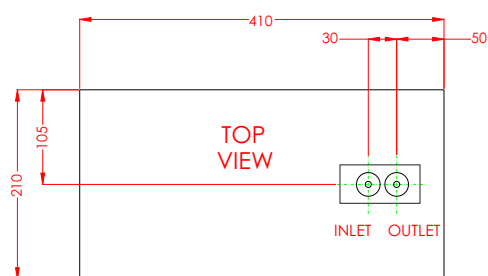

Chiller

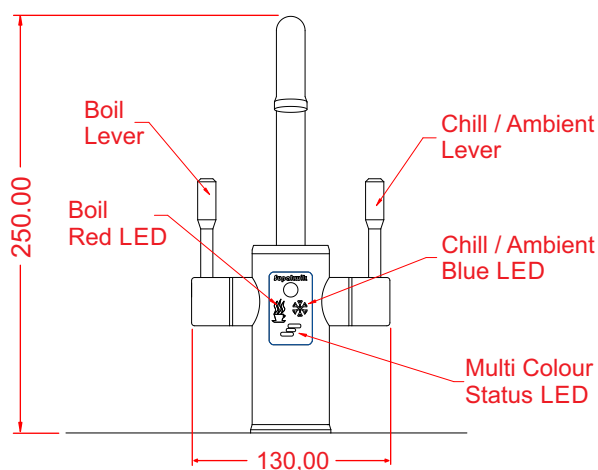

Combination Tap

Technical Specifications

Heater:

Nominal Capacity: 2,5 Litres
Recovery Rating: 150 Cups per hour.
Supply Rating: 10 Amps @ 240 Volt.
Service Rating: 100 -1000 kPa.
Weight: 11,5 Kg.(dry)

Chiller:

1,9 Litres
8 Litres per hour.
0,75 Amps @ 240 Volt.
100 -1000 kPa.
12,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Supatap - Motion Series


Underbench Filtered
120 Cups Boil - 8L Chilled

Product Code



BC120/60

Page N° 09


BC SERIES

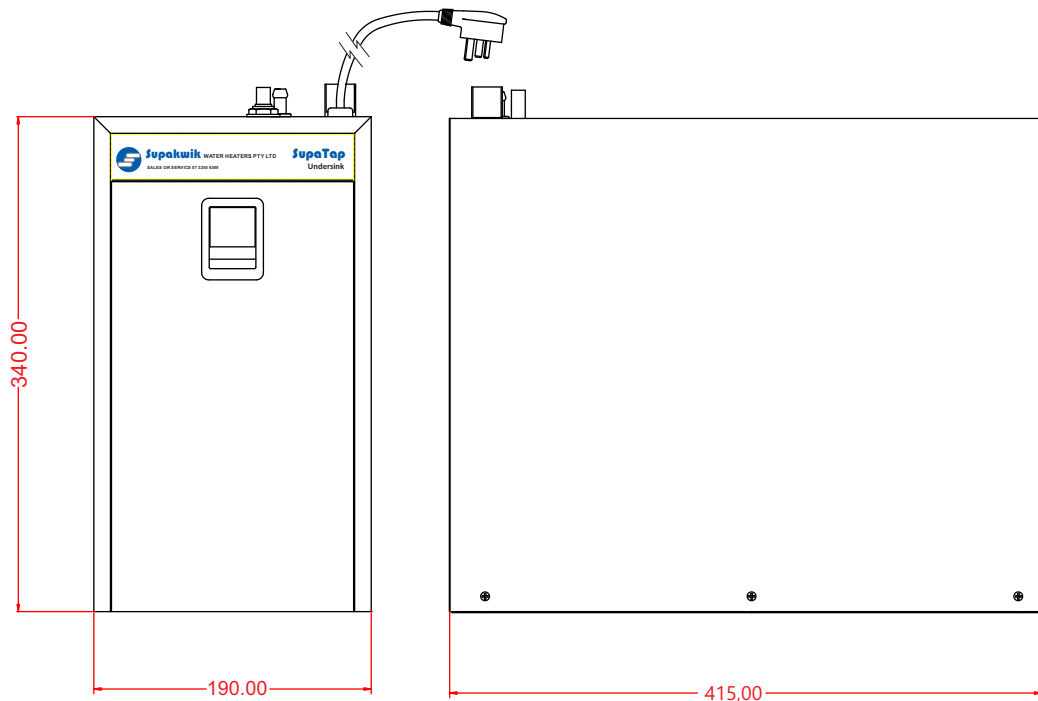

Boiler

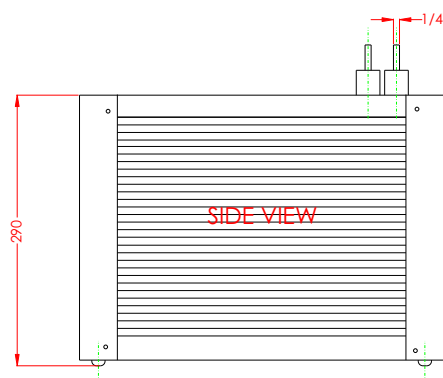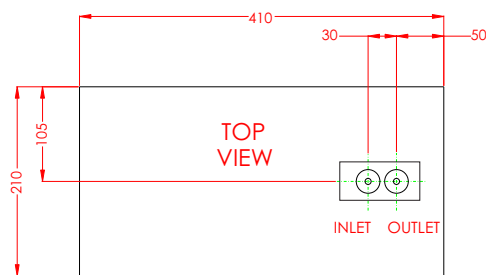

Chiller

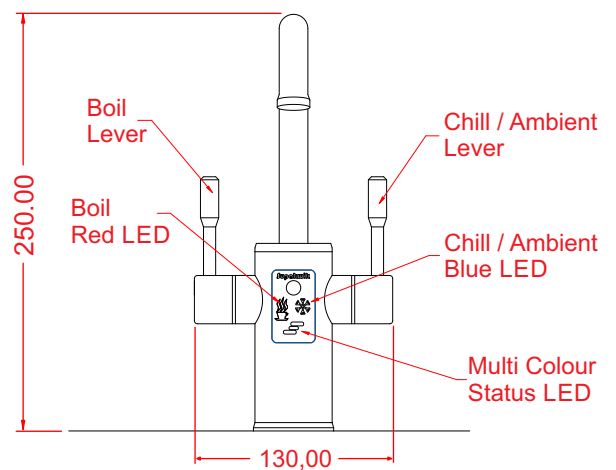

Combination Tap

Technical Specifications

Heater:

Nominal Capacity: 3,0 Litres
Recovery Rating: 150 Cups per hour
Supply Rating: 10 Amps @ 240 Volt.
Service Rating: 100 -1000 kPa.
Weight: 12,0 Kg.(dry)

Chiller:

1,9 Litres
8 Litres per hour
0,75 Amps @ 240 Volt.
100 -1000 kPa.
12,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Supatap - Motion Series





Underbench Filtered
170 Cups Boil - 8L Chilled

Product Code

BC170/60

Page N° 10

BC SERIES

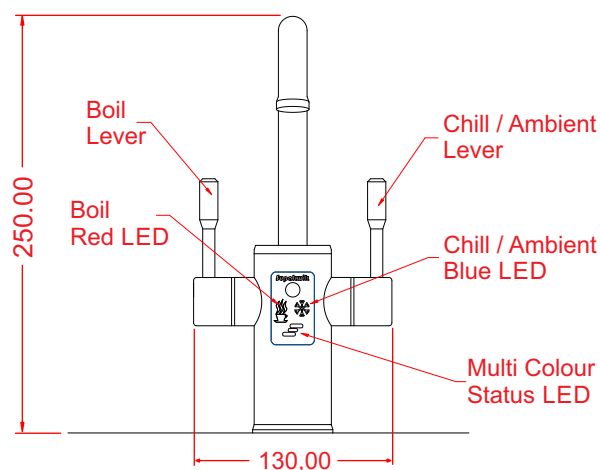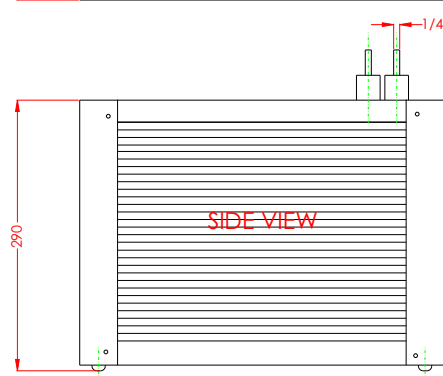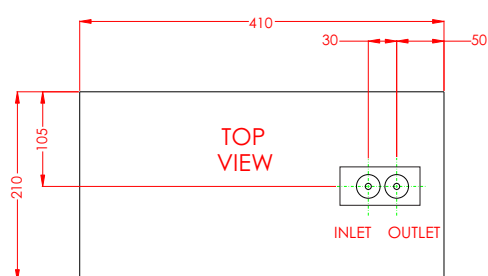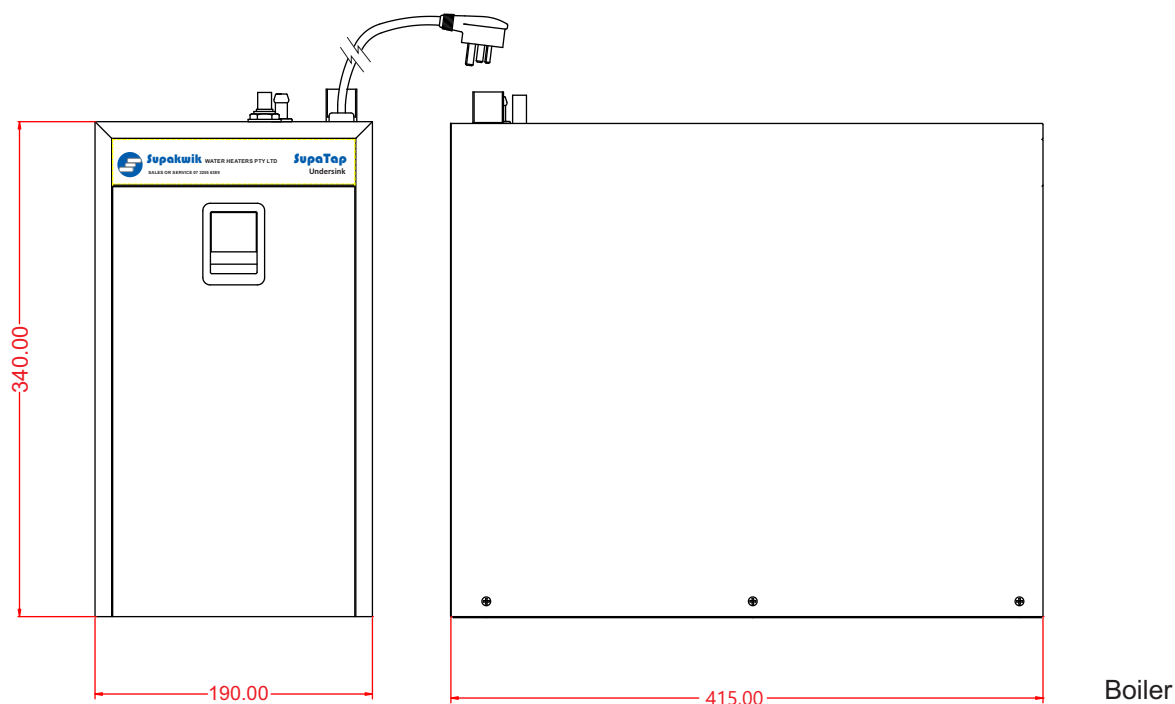

Combination Tap

Technical Specifications

Heater:

Nominal Capacity: 4,0 Litres
Recovery Rating: 150 Cups per hour.
Supply Rating: 10 Amps @ 240 Volt.
Service Rating: 100 -1000 kPa.
Weight: 12,5 Kg.(dry)

Chiller:

1,9 Litres
8 Litres per hour.
0,75 Amps @ 240 Volt.
100 -1000 kPa.
12,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Supatap - Motion Series


Underbench Filtered
200 Cups Boil - 8L Chilled

Product Code



BC200/60

Page N° 11


BC SERIES

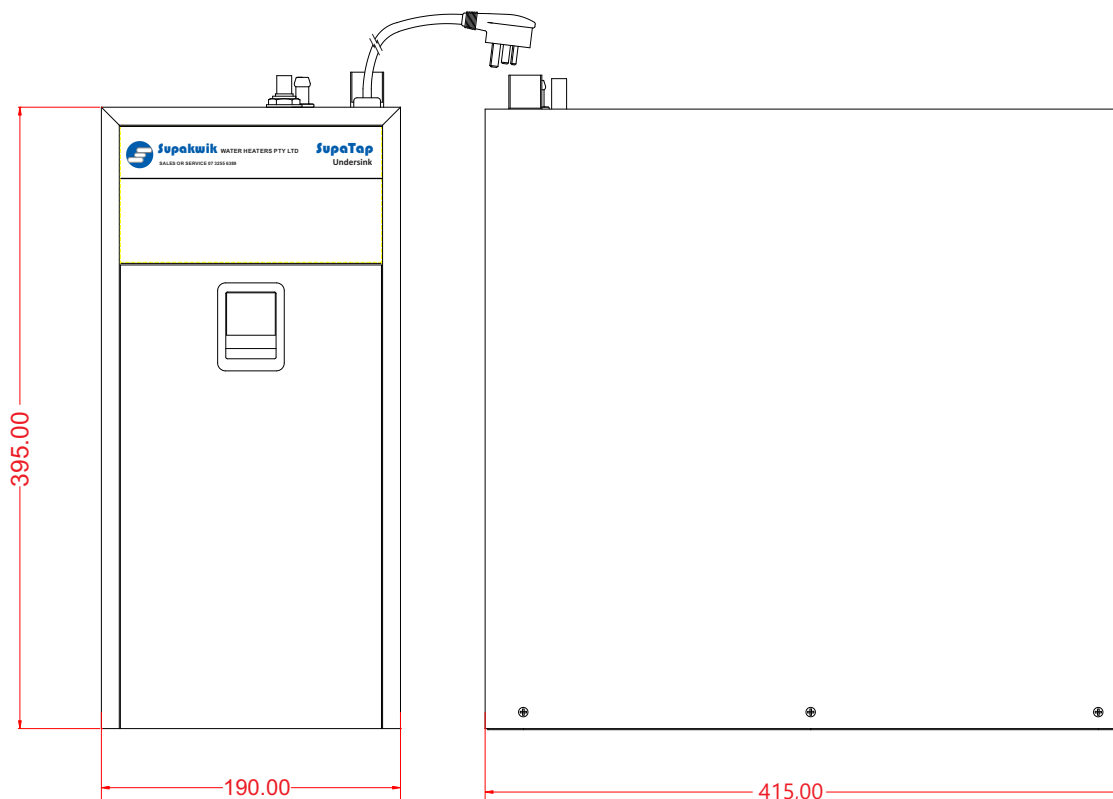

Boiler

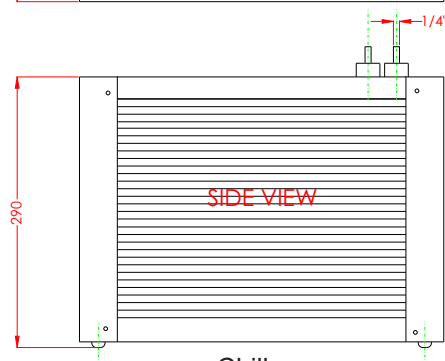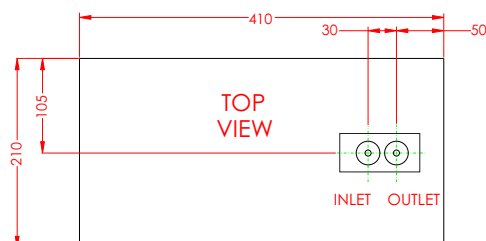

Chiller

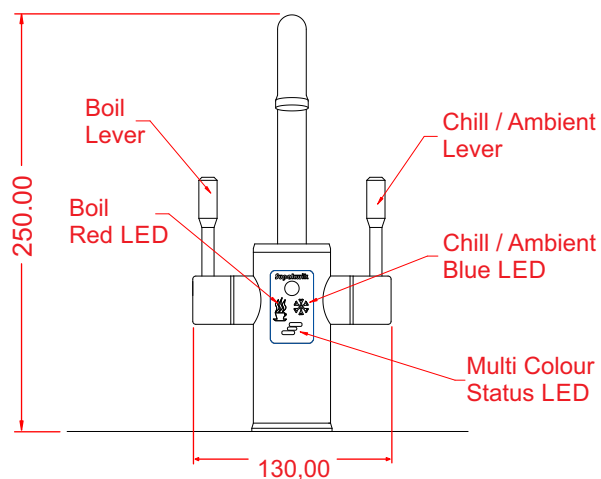

Heater:

Nominal Capacity: 6,0 Litres
Recovery Rating: 150 Cups per hour.
Supply Rating: 10 Amps @ 240 Volt.
Service Rating: 100 -1000 kPa.
Weight: 13,0 Kg.(dry)

Chiller:

1,9 Litres
8 Litres per hour.
0,75 Amps @ 240 Volt.
100 -1000 kPa.
12,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com




Supatap - Motion Series

Underbench Filtered
170 Cups Boil - 8L Chilled - Ambient



Product Code
BCF170/60

Page N° 12


BCF SERIES

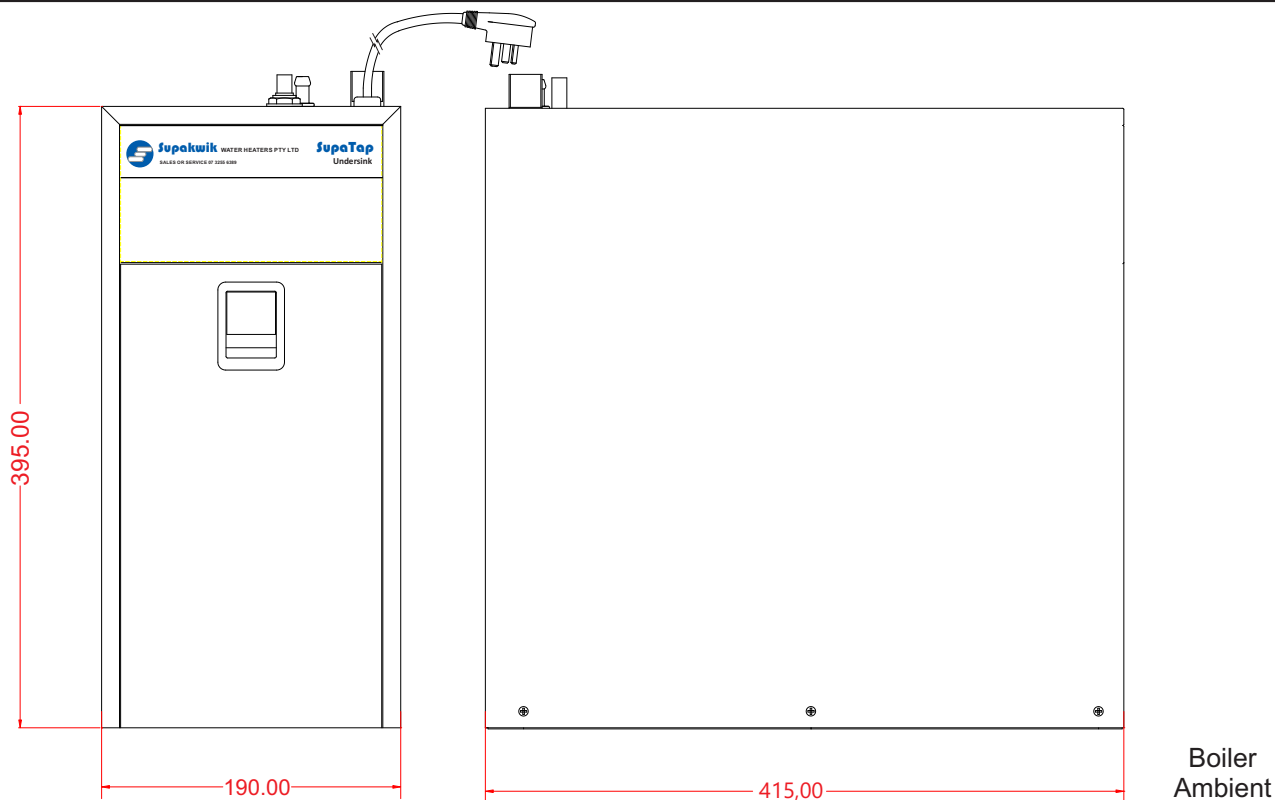

Boiler
Ambient

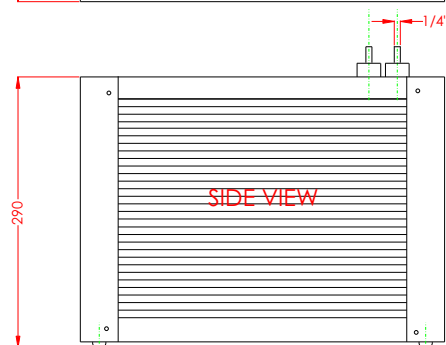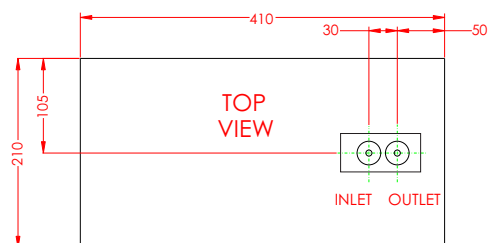

Chiller

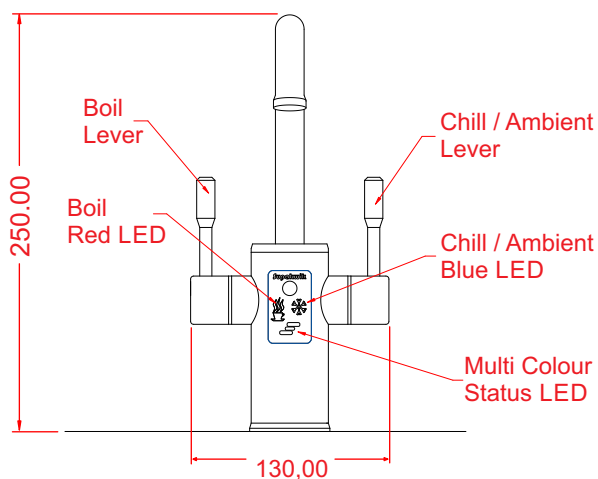

Heater:

Nominal Capacity: 6,0 Litres
Recovery Rating: 150 Cups per hour.
Supply Rating: 10 Amps @ 240 Volt.
Service Rating: 100 -1000 kPa.
Weight: 12,5 Kg.(dry)

Chiller:

1,9 Litres
8 Litres per hour.
0,75 Amps @ 240 Volt.
100 -1000 kPa.
12,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com




Supatap - Motion Series

Underbench Filtered
200 Cups Boil - 8L Chilled - Ambient



Product Code
BCF200/60

Page N° 13


BCF SERIES

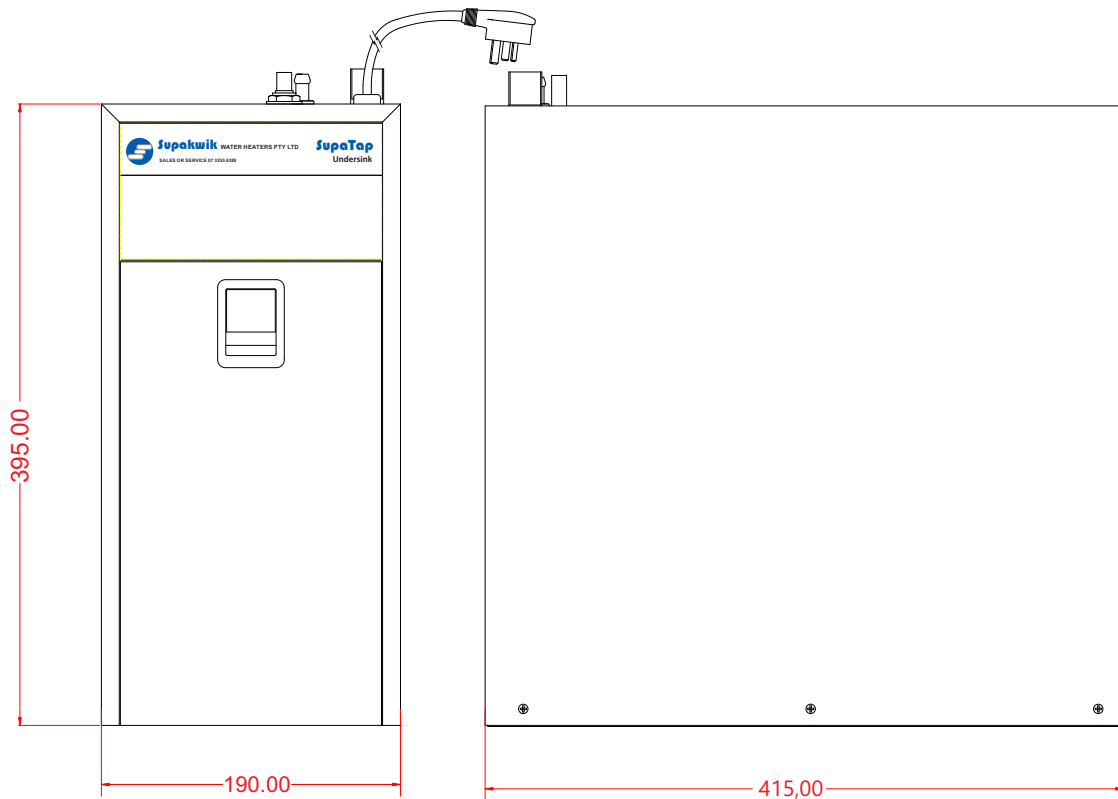

Boiler
Ambient

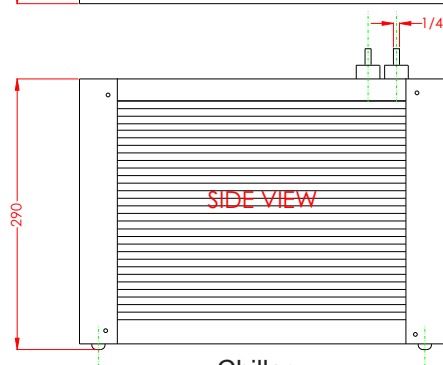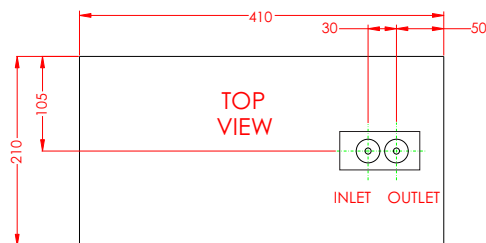

Chiller

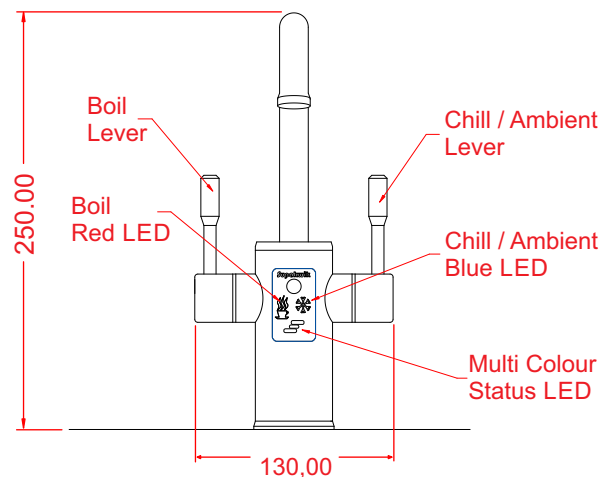

Heater:

Nominal Capacity: 6,0 Litres
Recovery Rating: 150 Cups per hour.
Supply Rating: 10 Amps @ 240 Volt.
Service Rating: 100 -1000 kPa.
Weight: 13,0 Kg.(dry)

Chiller:

1,9 Litres
8 Litres per hour.
0,75 Amps @ 240 Volt.
100 -1000 kPa.
12,5 Kg.(dry)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com



SUPABOIL - MOTION SERIES




20 Cup, White
(Stainless Steel Cover Available)

Product Code


MA020

Page N° 14

M SERIES

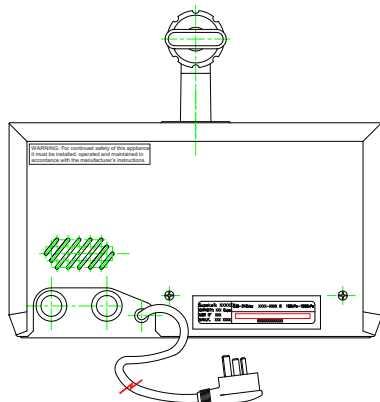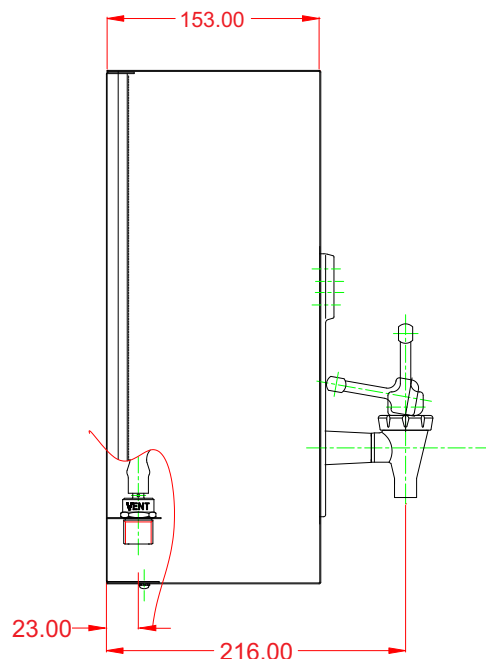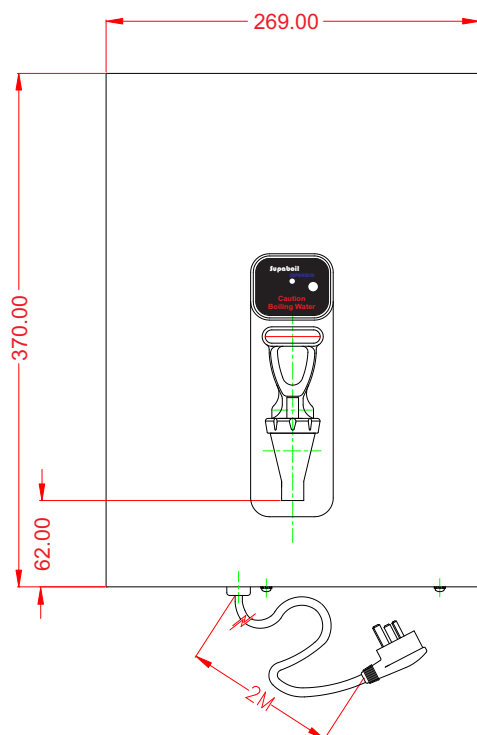

Controls & Electrical Circuitry
removed for clarity

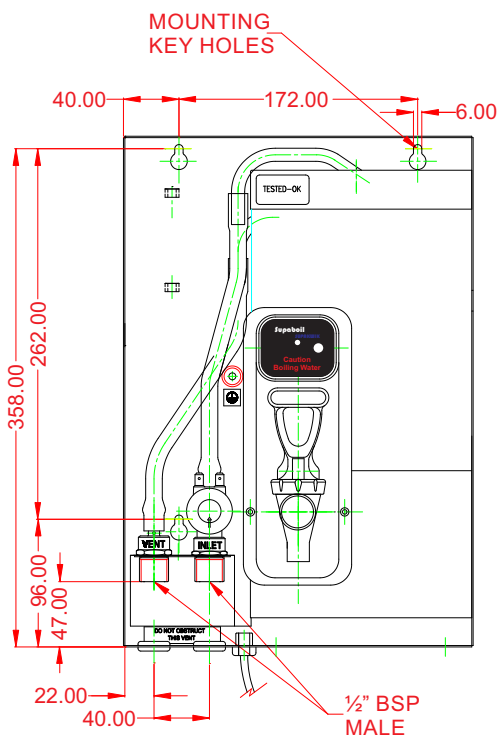

Technical Specifications

Nominal Capacity:	3 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	5,5 Kg.(dry) 8,6 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



SUPABOIL - MOTION SERIES




38 Cup, White
(Stainless Steel Cover Available)

Product Code


MA038

Page N° 15

M SERIES

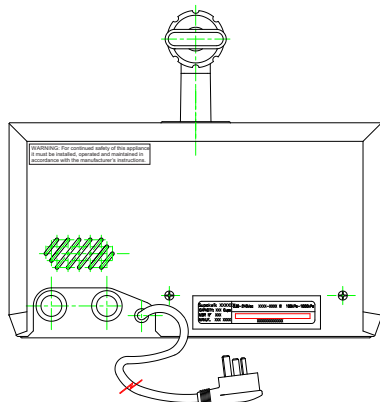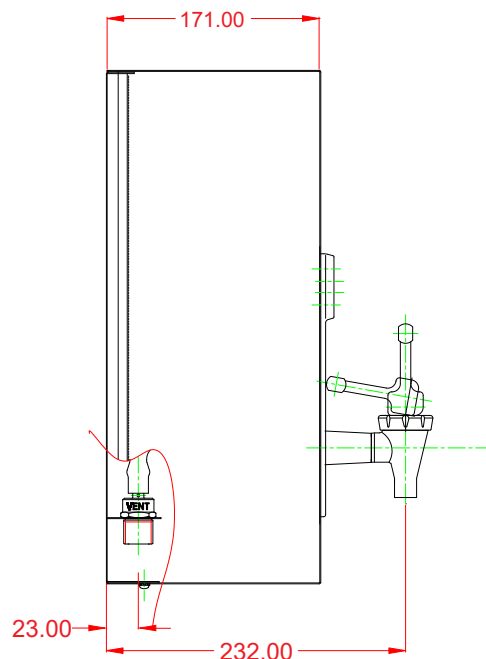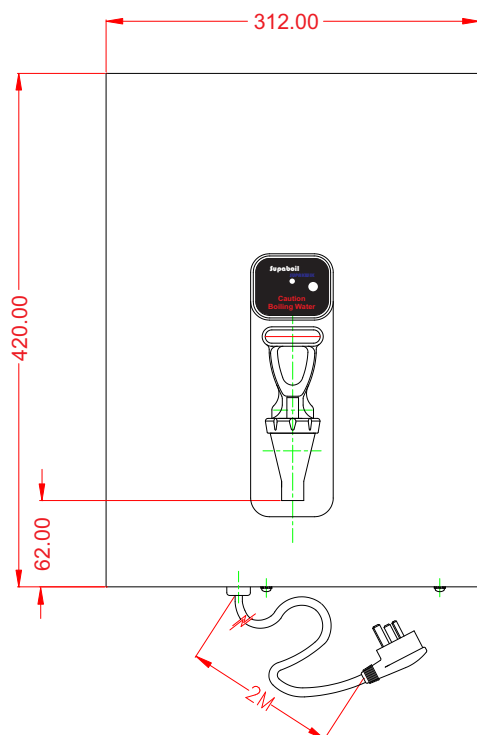

Controls & Electrical Circuitry
removed for clarity

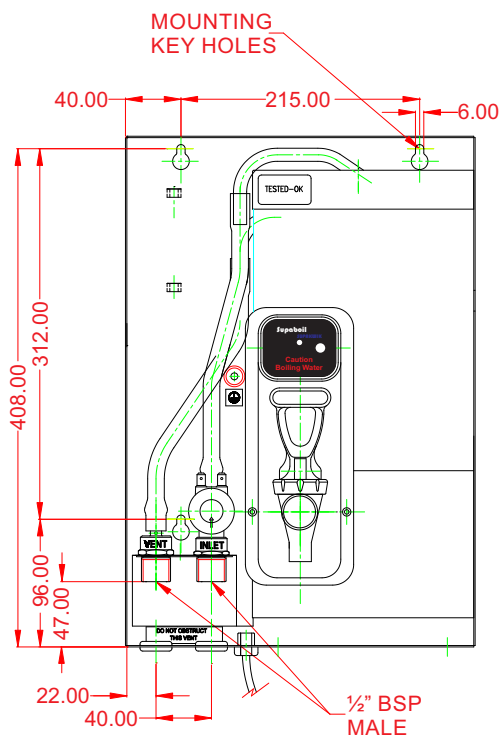

Technical Specifications

Nominal Capacity:	6 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	7,2 Kg.(dry) 14,8 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



SUPABOIL - MOTION SERIES



50 Cup, White
(Stainless Steel Cover Available)

Product Code


MA050

Page N° 16


M SERIES

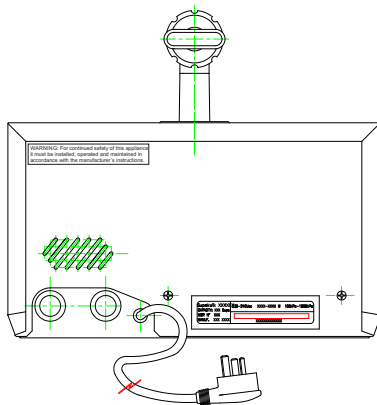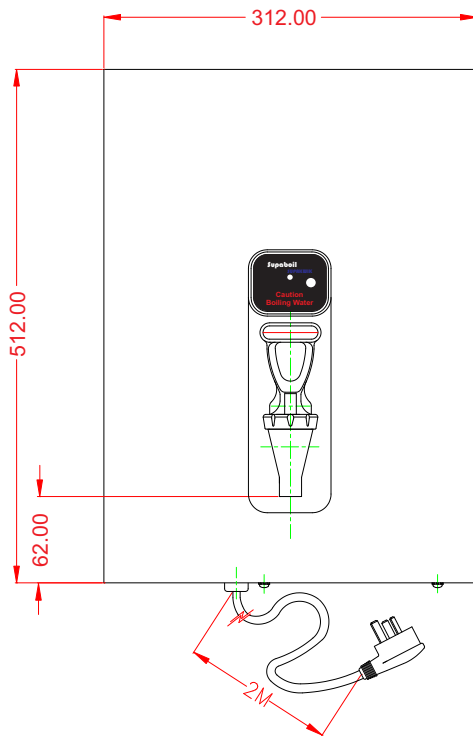

Controls & Electrical Circuitry
removed for clarity

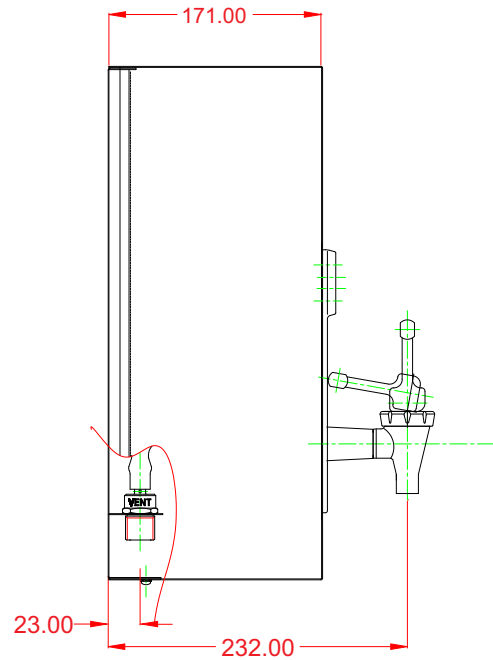

MOUNTING
KEY HOLES

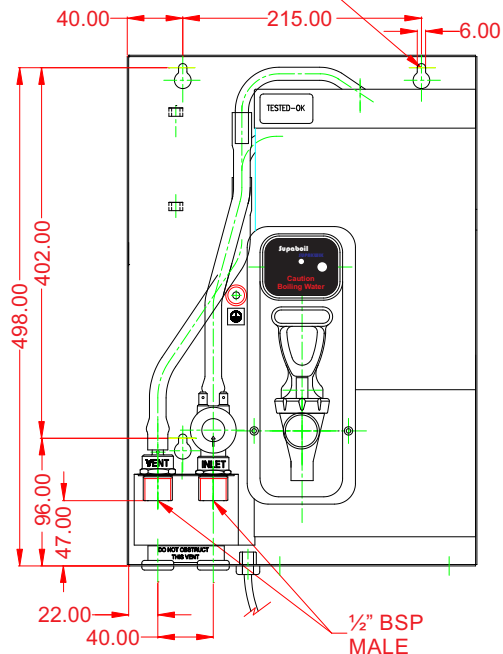

Technical Specifications

Nominal Capacity:	8 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	8,1 Kg.(dry) 17,2 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



SUPABOIL - MOTION SERIES


20 Cup, White - Filtered

(Stainless Steel Cover Available)

Product Code

MA020F

Page N° 17

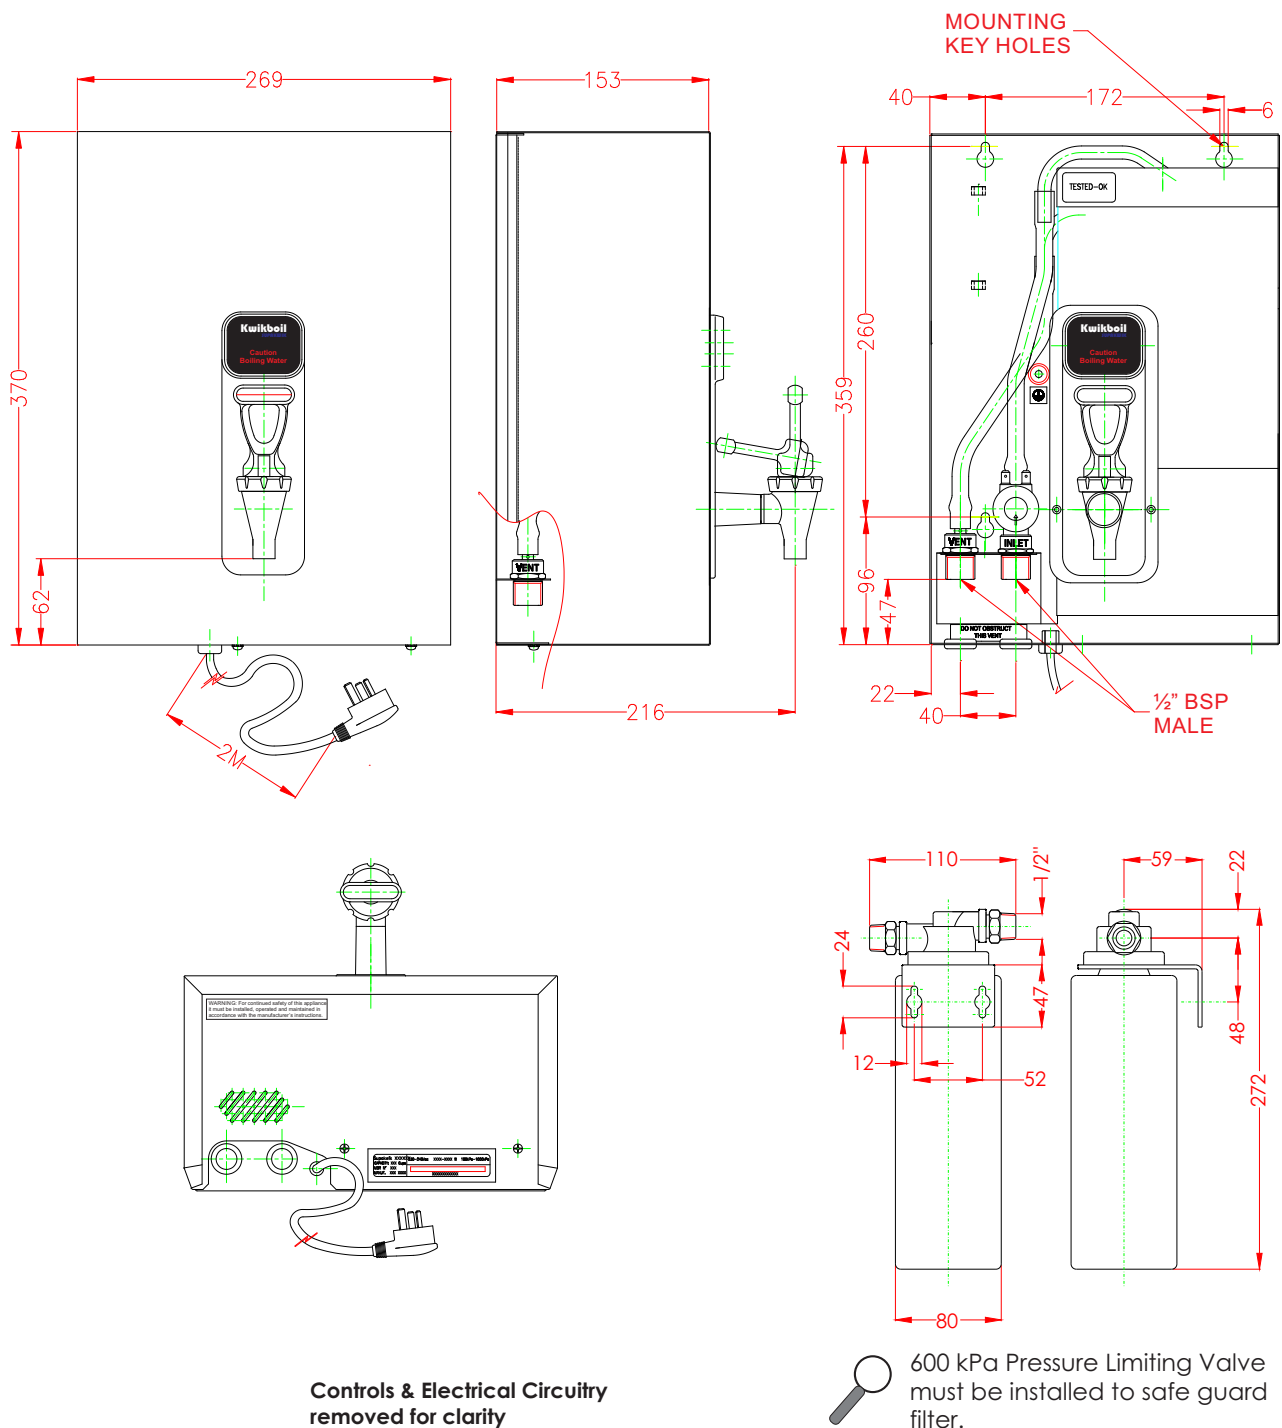

M SERIES

Technical Specifications

Nominal Capacity:	3 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	5,5 Kg.(dry) 8,6 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com




SUPABOIL - MOTION SERIES

38 Cup, White - Filtered
(Stainless Steel Cover Available)

Product Code

MA038F

Page N° 18

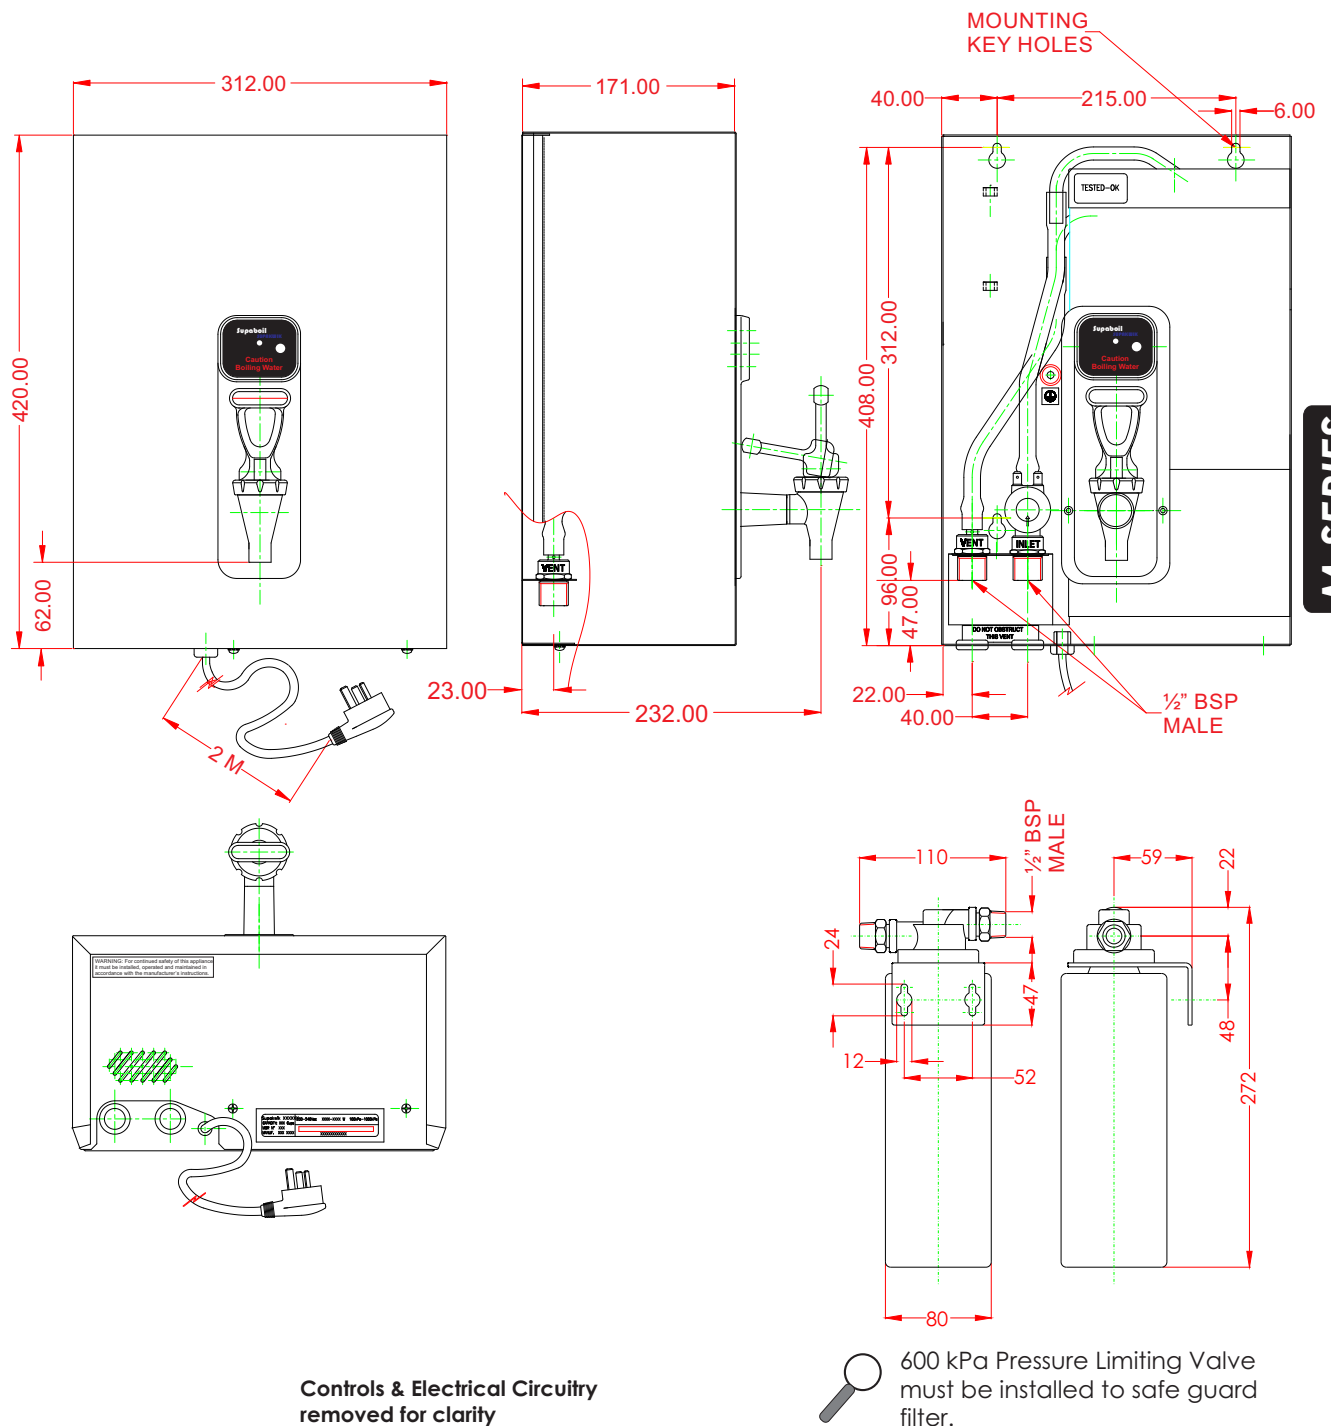

M SERIES

Technical Specifications

Nominal Capacity:	6 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	7,2 Kg.(dry) 14,8 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com




SUPABOIL - MOTION SERIES

50 Cup, White - Filtered
(Stainless Steel Cover Available)

Product Code

MA050F

Page N° 19

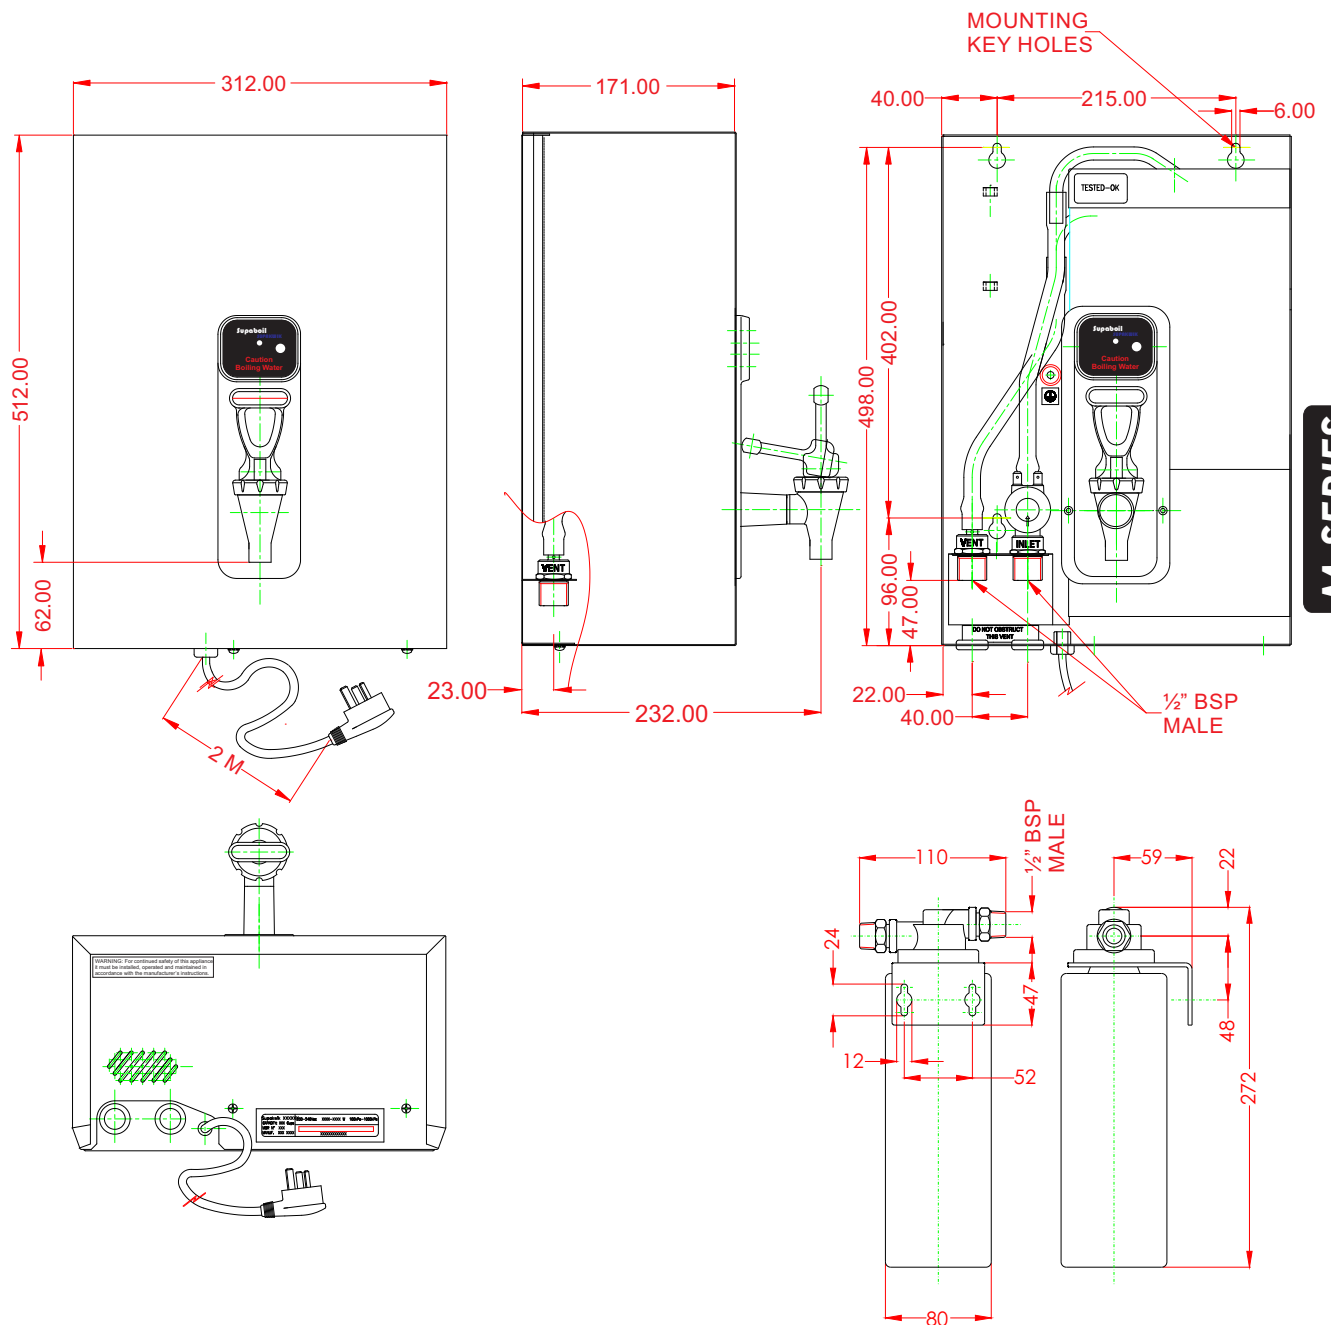

M SERIES

Controls & Electrical Circuitry removed for clarity



600 kPa Pressure Limiting Valve must be installed to safe guard filter.

Technical Specifications

Nominal Capacity:	8 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	8,1 Kg.(dry) 17,2 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com



KWIKBOIL - STANDARD SERIES

20 Cup, White





(Stainless Steel Cover Available)

Product Code

SA020

Page N° 20

S SERIES

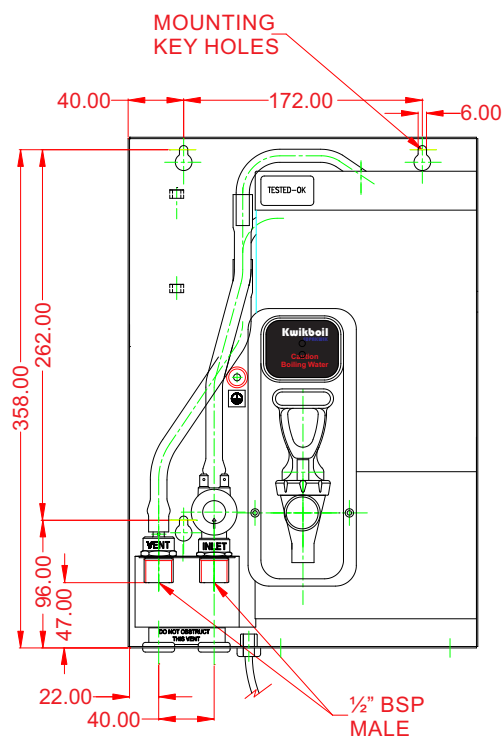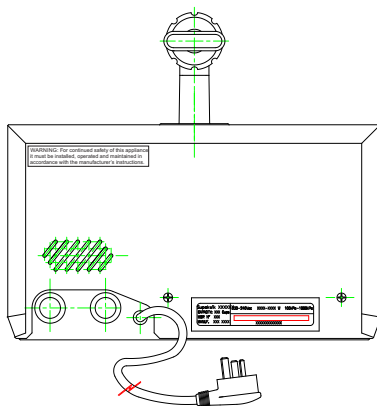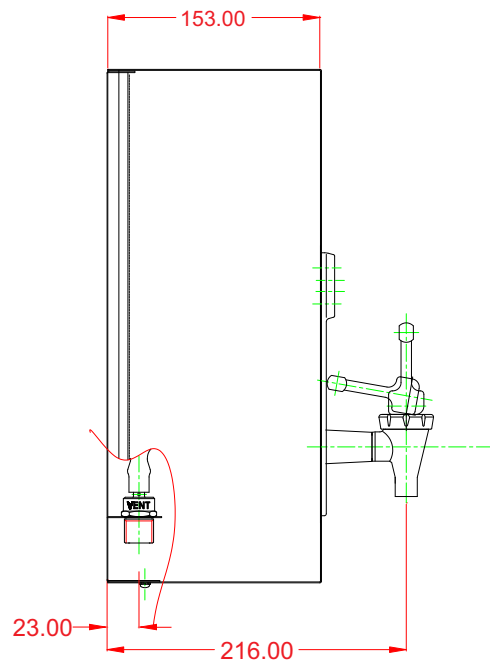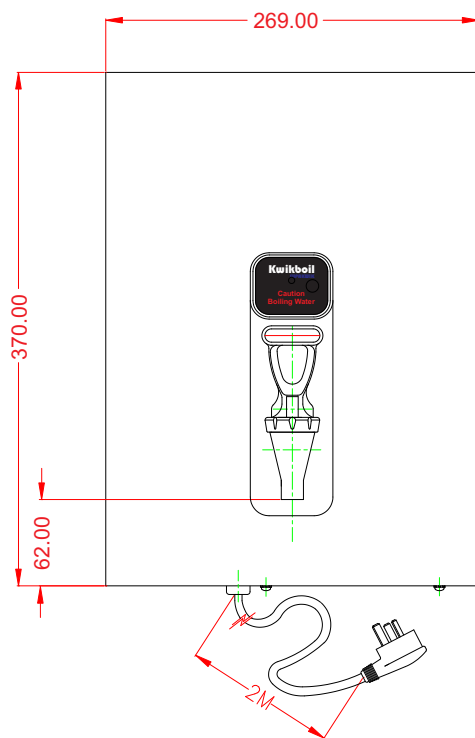

Controls & Electrical Circuitry
removed for clarity

Technical Specifications

Nominal Capacity:	3 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	5,5 Kg.(dry) 8,6 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



KWIKBOIL - STANDARD SERIES

38 Cup, White





(Stainless Steel Cover Available)

Product Code

SA038

Page N° **21**

S SERIES

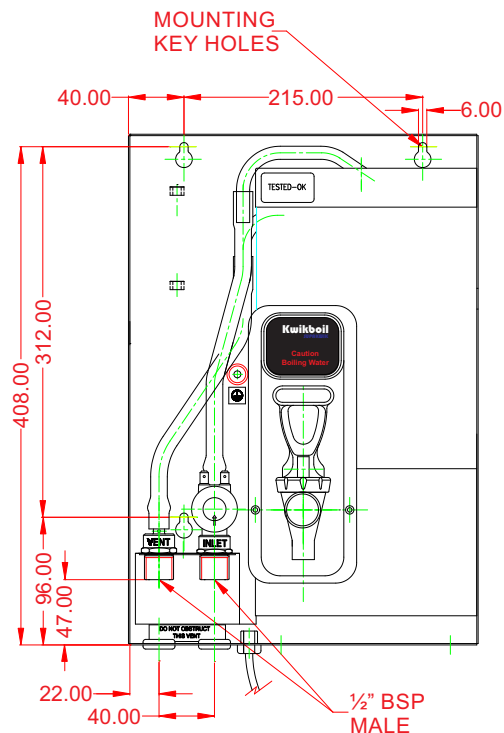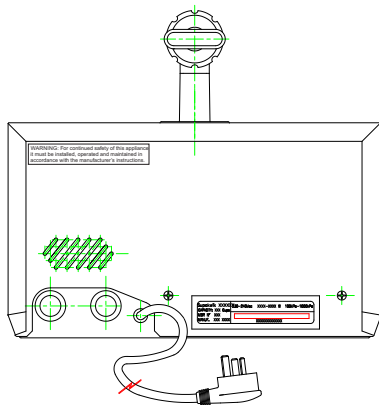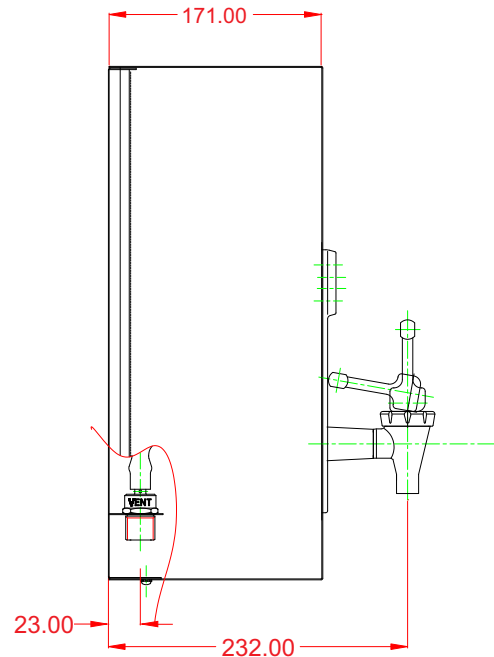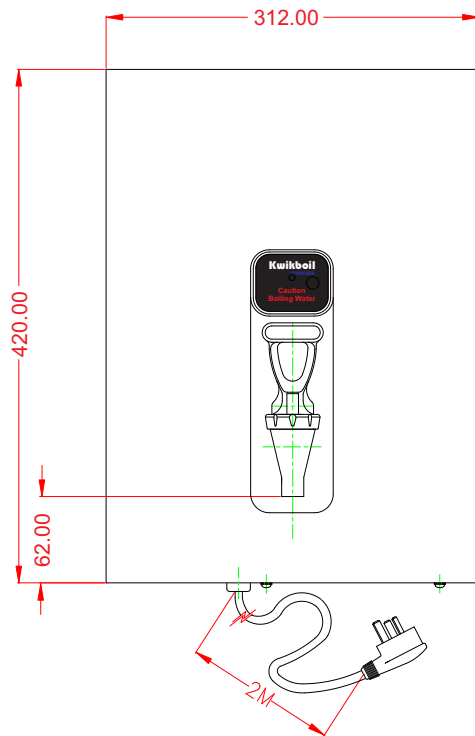

Controls & Electrical Circuitry
removed for clarity

Technical Specifications

Nominal Capacity:	6 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	7.2 Kg.(dry) 14,8 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



KWIKBOIL - STANDARD SERIES

50 Cup, White




(Stainless Steel Cover Available)

Product Code


SA050

Page N° 22

S SERIES

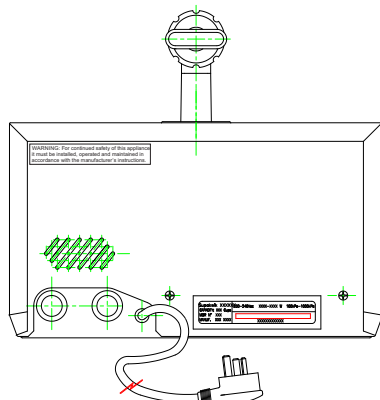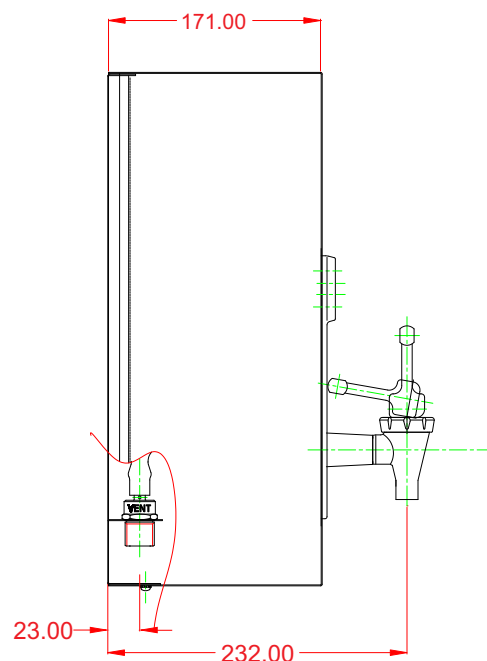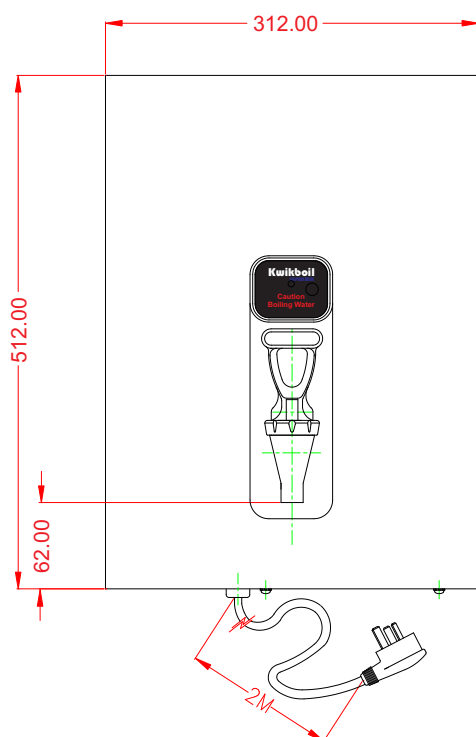

Controls & Electrical Circuitry
removed for clarity

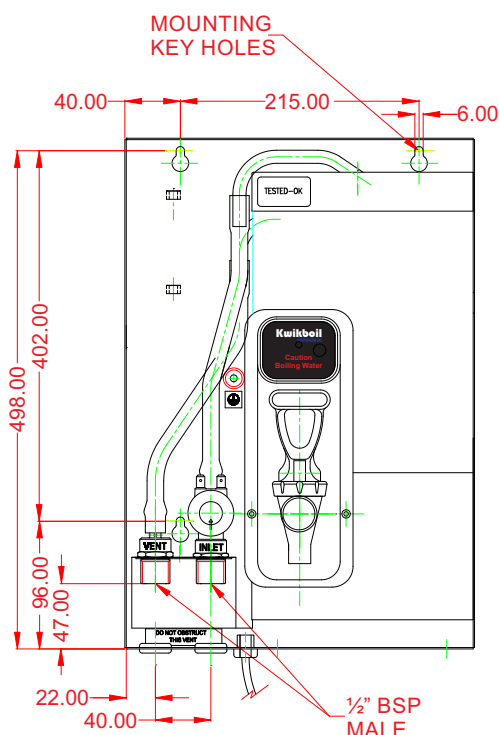

Technical Specifications

Nominal Capacity:	8 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	8,1 Kg.(dry) 17,2 Kg.(full)

Cup Size = 167 ml


SUPAKWIK water heaters pty ltd



supakwik.com



SA 100

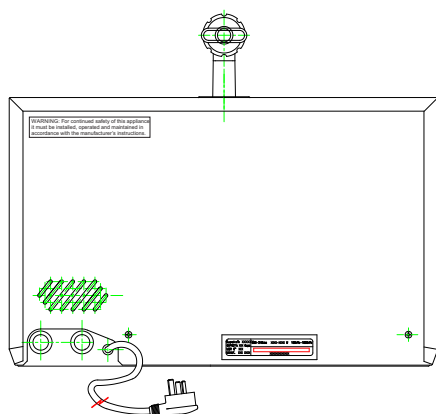Page N° **23**[illegible]

Nominal Capacity:	16 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	11,0 Kg.(dry) 28,8 Kg.(full)

SUPAKWIK water heaters pty ltd



supakwik.com



KWIKBOIL - STANDARD SERIES

160 Cup, White




(Stainless Steel Cover Available)

Product Code


SA160

Page N° 24

S SERIES

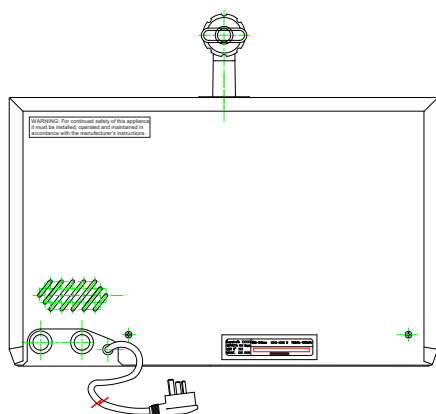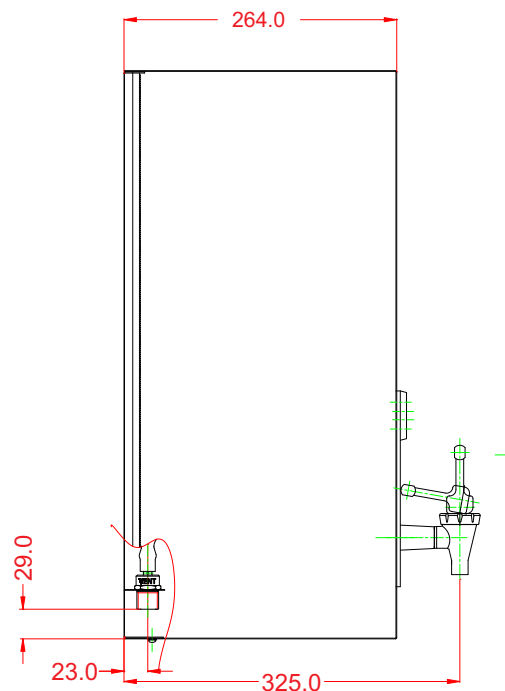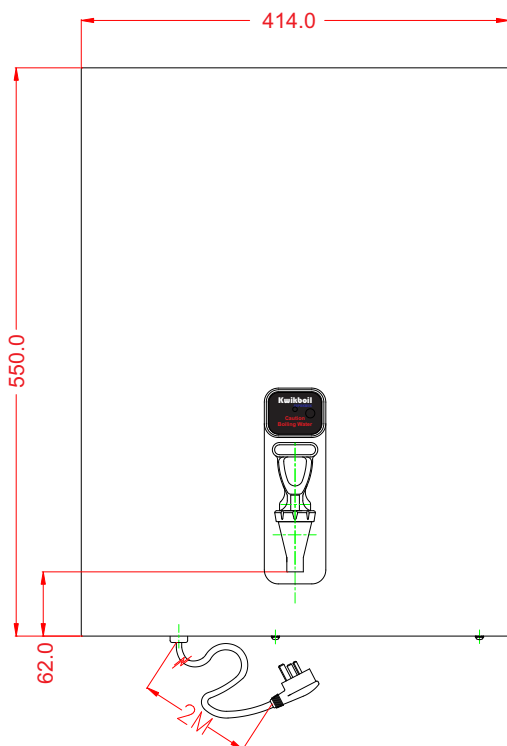

Controls & Electrical Circuitry
removed for clarity

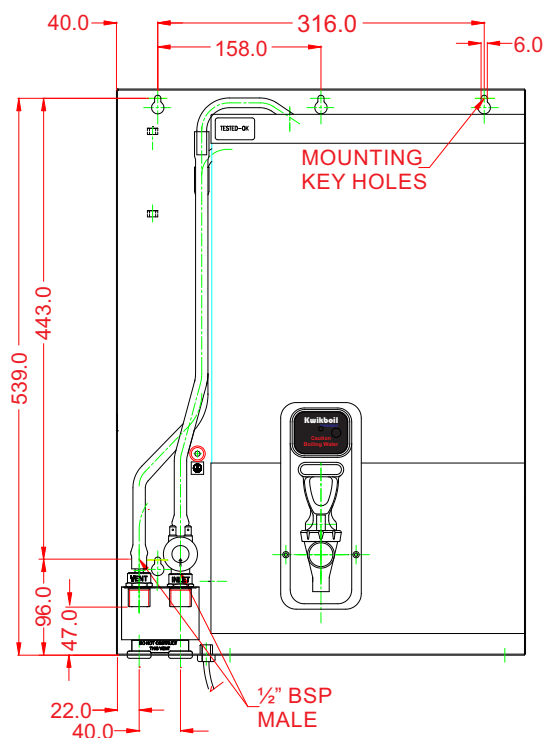

Technical Specifications

Nominal Capacity:	25 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	12,3 Kg.(dry) 37,8 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



AUSTRALIAN MADE
AND OWNED

supakwik.com



KWIKBOIL - STANDARD SERIES


20 Cup, White - Filtered

(Stainless Steel Cover Available)

Product Code

SA020F

Page N° **25**

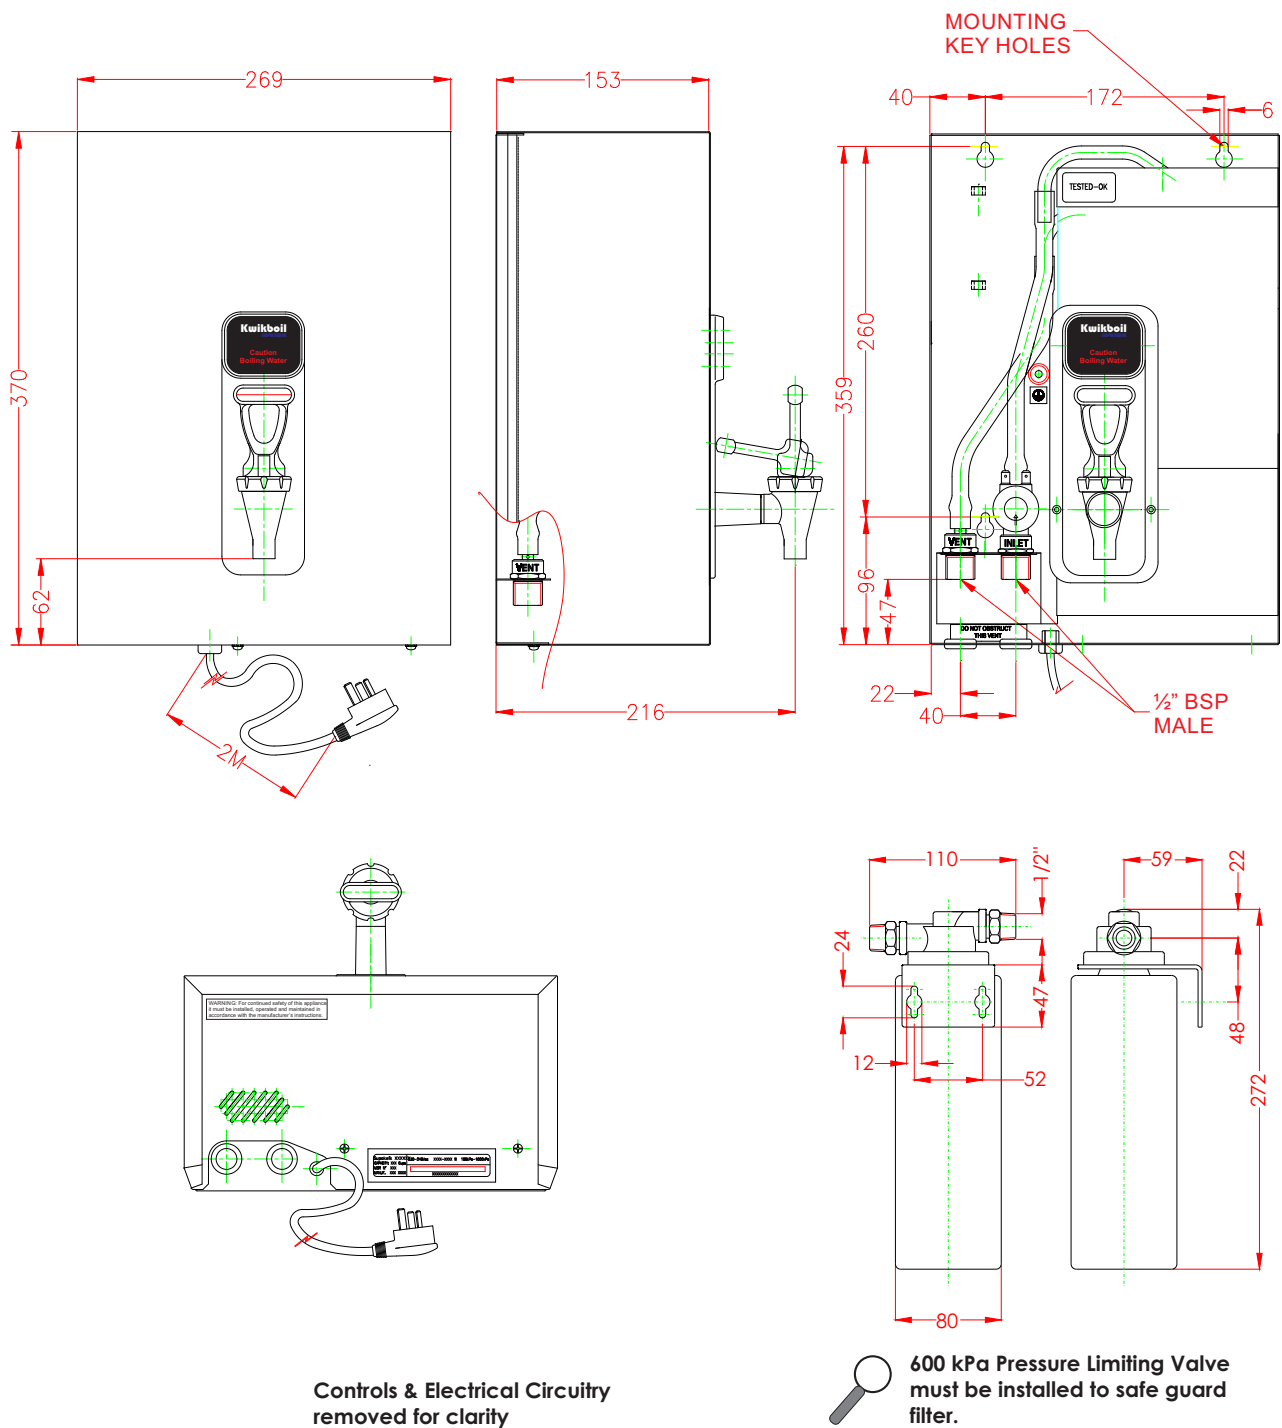

S SERIES

Technical Specifications

Nominal Capacity:	3 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	5,5 Kg.(dry) 8,6 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com



KWIKBOIL - STANDARD SERIES


38 Cup, White - Filtered

(Stainless Steel Cover Available)

Product Code

SA038F

Page N° 26

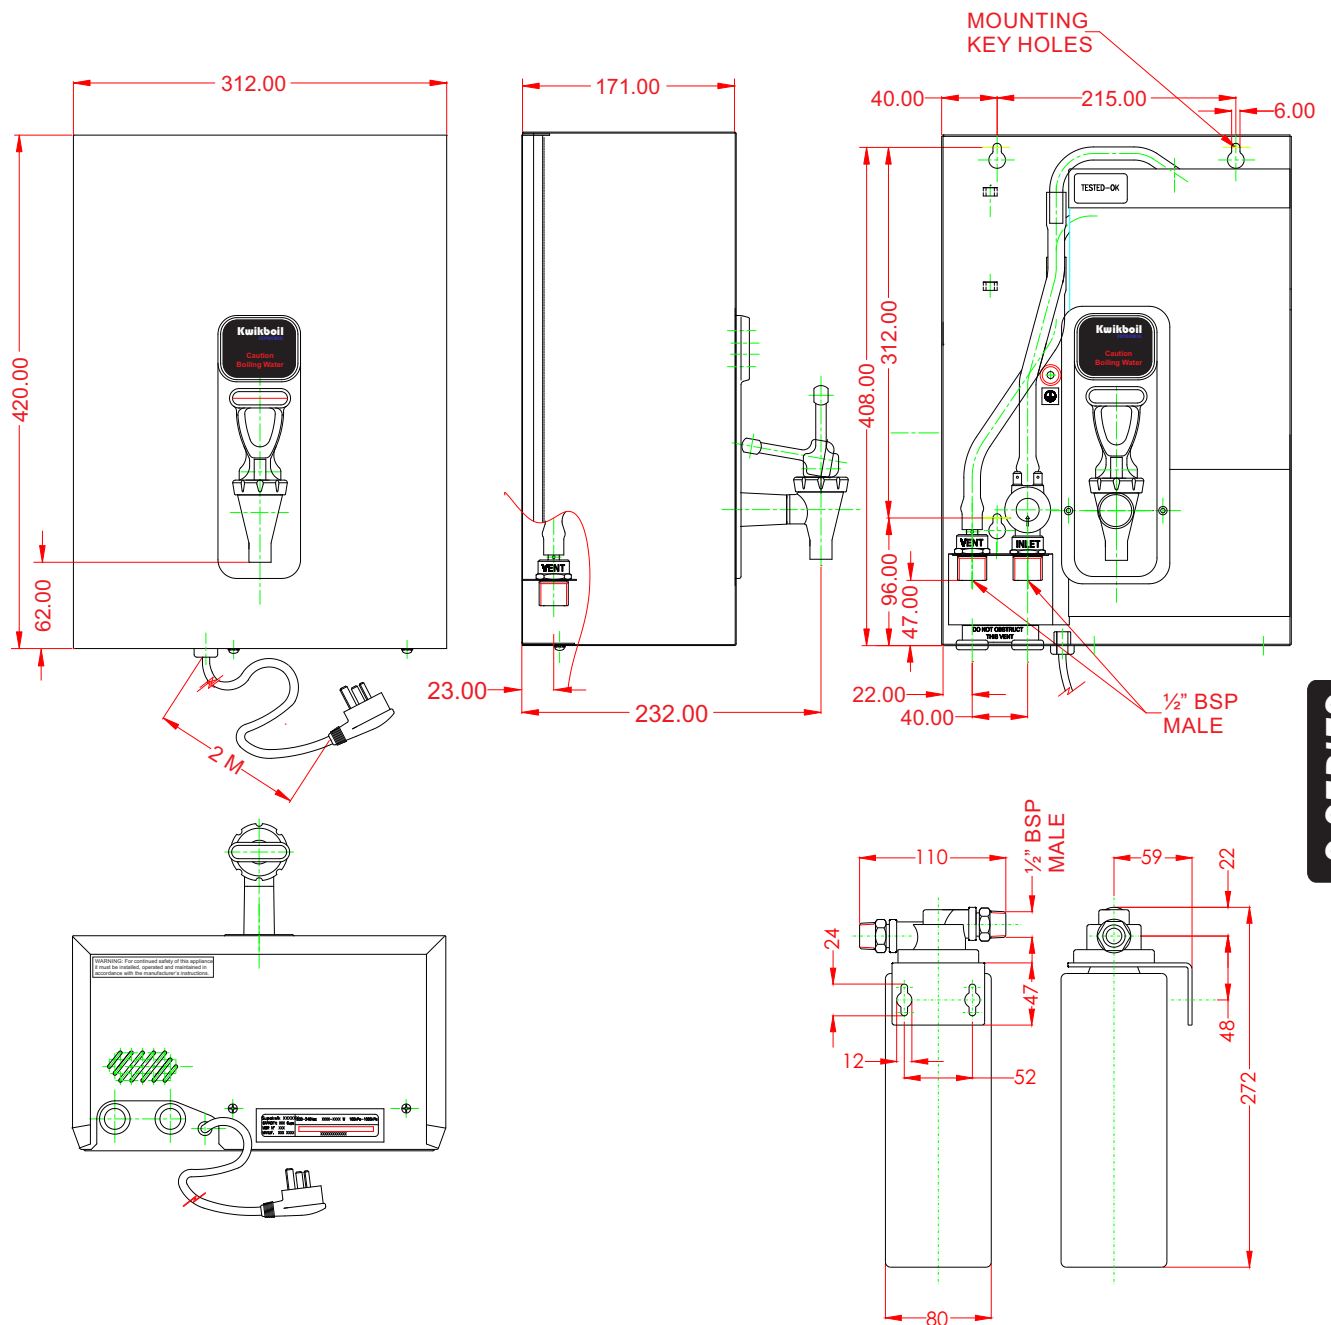

S SERIES

Controls & Electrical Circuitry removed for clarity

Technical Specifications

Nominal Capacity:	6 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	7,2 Kg.(dry) 14,8 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com



KWIKBOIL - STANDARD SERIES


50 Cup, White - Filtered

(Stainless Steel Cover Available)

Product Code

SA050F

Page N° 27

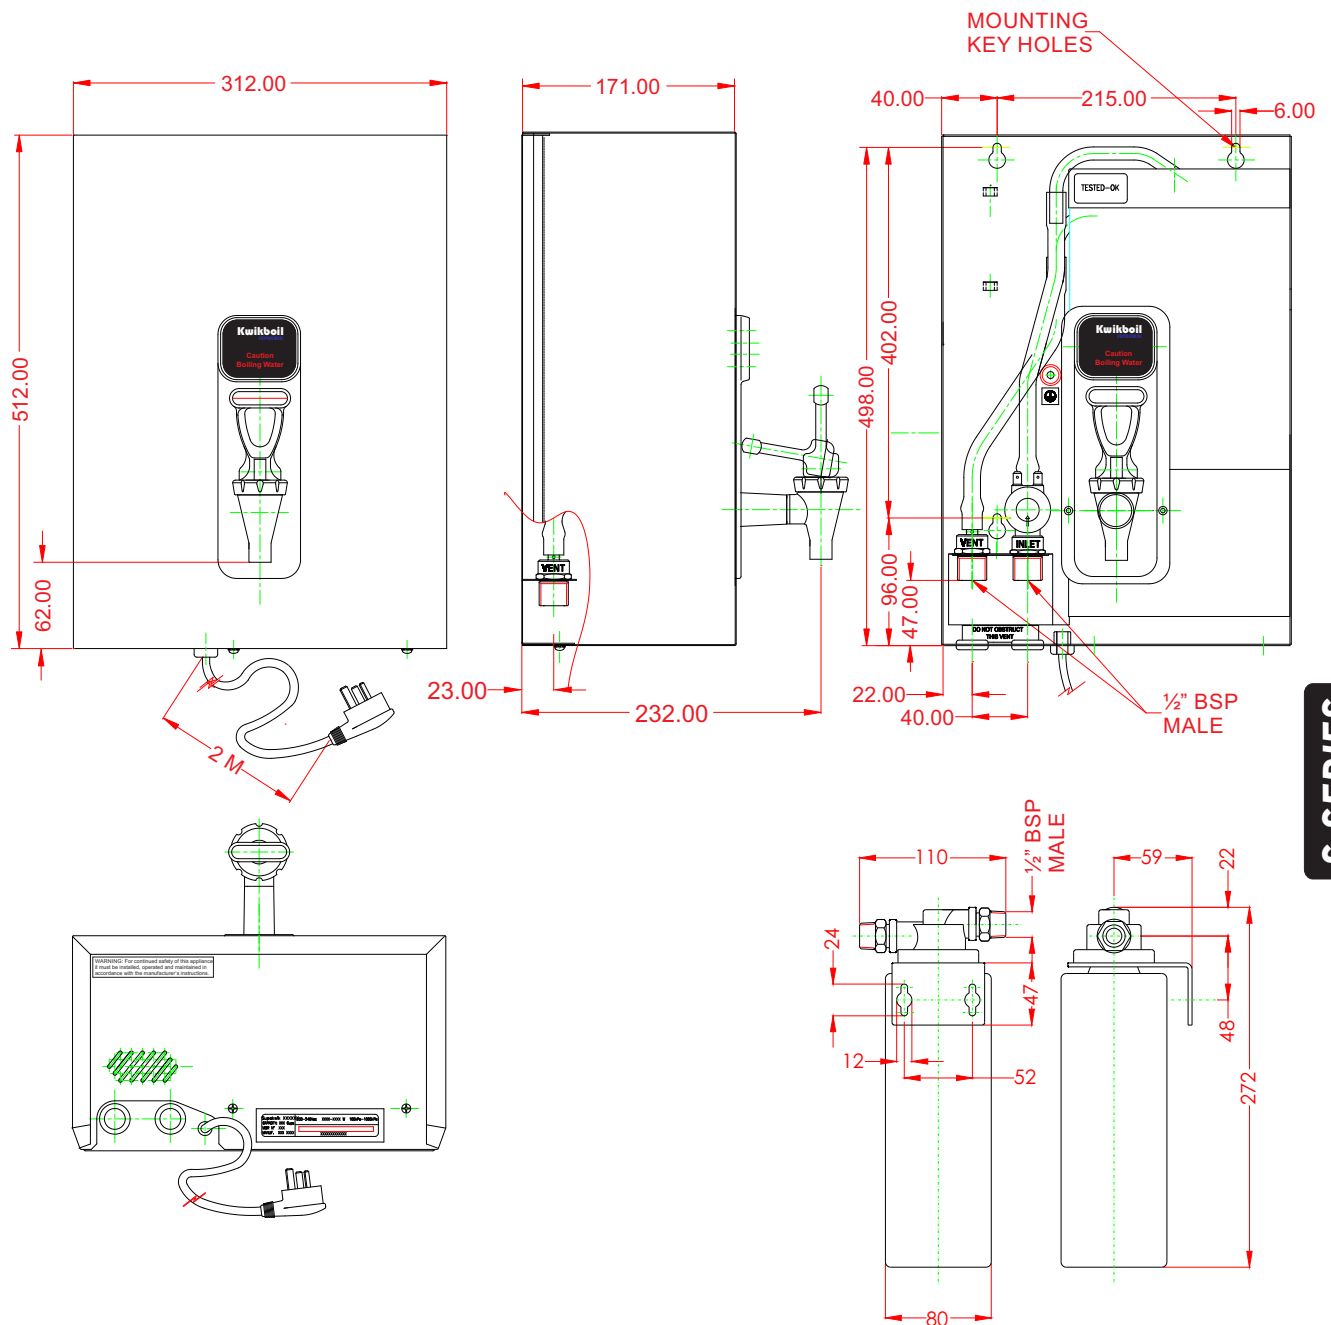

Controls & Electrical Circuitry
removed for clarity



600 kPa Pressure Limiting Valve
must be installed to safe guard
filter.

Technical Specifications

Nominal Capacity:	8 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	8,1 Kg.(dry) 17,2 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com

S SERIES




KWIKBOIL - STANDARD SERIES

100 Cup, White - Filtered
(Stainless Steel Cover Available)

Product Code

SA100F

Page N° 28

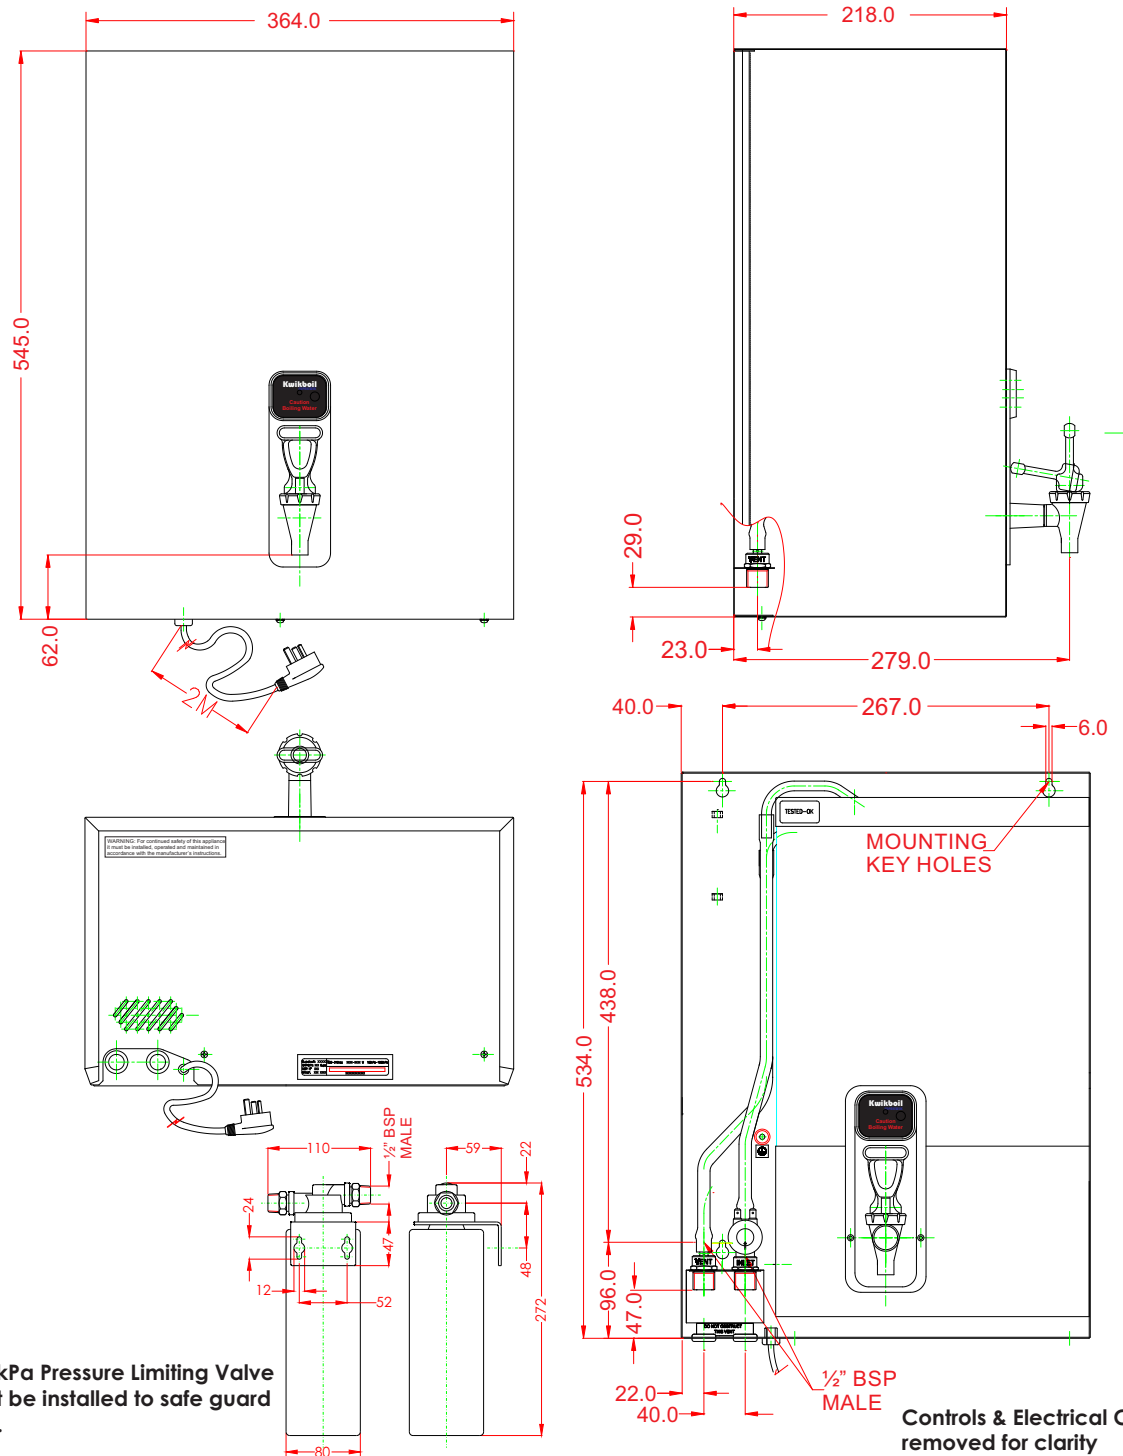

S SERIES

Technical Specifications

Nominal Capacity:	16 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	11,0 Kg.(dry) 28,8 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com




KWIKBOIL - STANDARD SERIES

160 Cup, White - Filtered
(Stainless Steel Cover Available)

Product Code

SA160F

Page N° 29

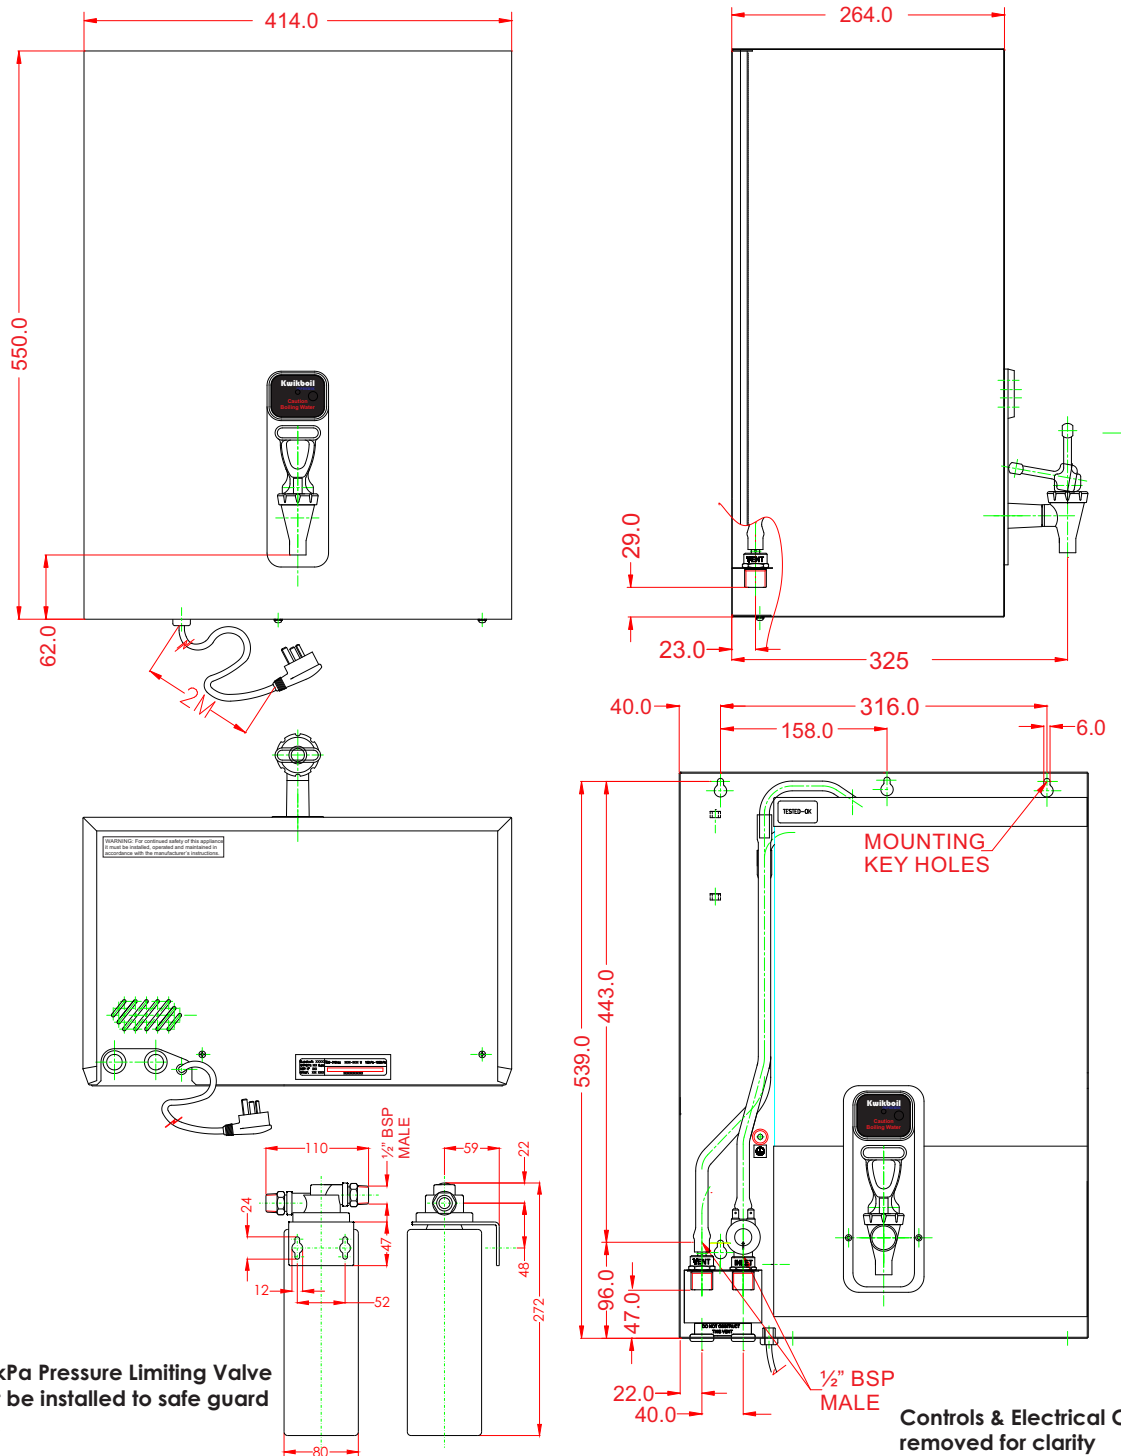

S SERIES

Technical Specifications

Nominal Capacity:	25 Litres
Recovery Rating:	150 Cups per hour.
Supply Rating:	10 Amps @ 240 Volt.
Service Rating:	20-1000 kPa.
Weight:	12,3 Kg.(dry) 37,8 Kg.(full)

Cup Size = 167 ml

SUPAKWIK water heaters pty Ltd



supakwik.com



UNDER BENCH CHILLER KIT





8 Litres Per Hour - Filtered
White

Product Code
UB6030K

Page N° 30

Included:

Chiller
Goose Neck Tap
350 kPa Pressure Limiting Valve
Pressure Relief Valve
2 Meters LLDPE Tubing
Filter
Wall Mountable Filter Head Bracket
1/4" Quick Connect Fittings

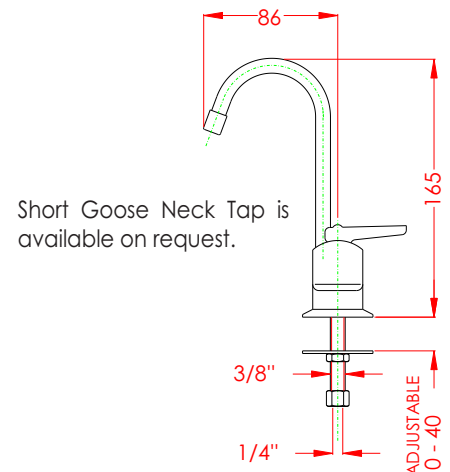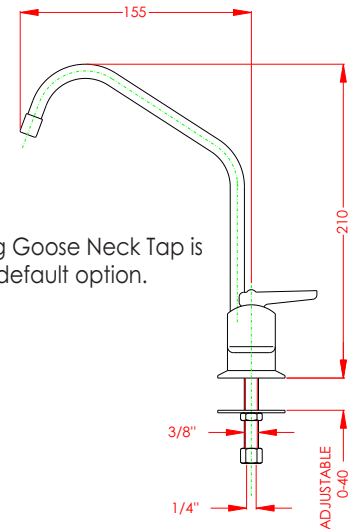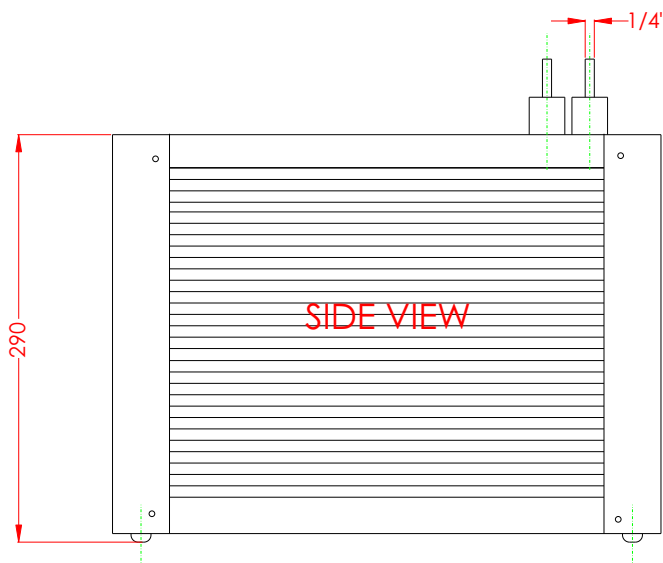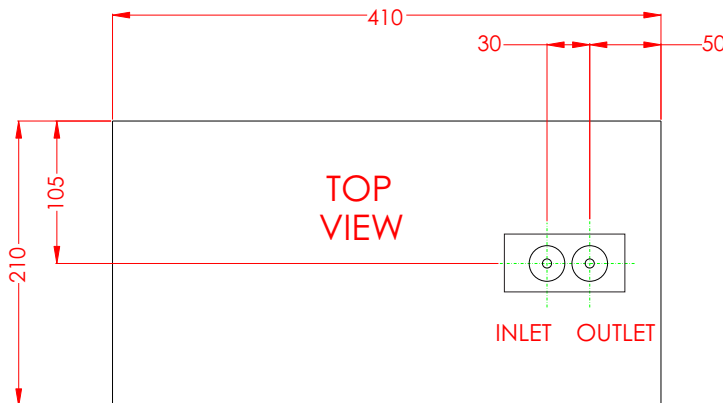

The 350 kPa Pressure Limiting Valve supplied, must be installed to safe guard the Cooler.



The Chiller must always be installed level, with the inlet and outlet tubes facing up.

Technical Specifications

Nominal Capacity: 1,9 Litres
Recovery: 8 Litres per hour
Supply Rating: 0.75 Amps @ 240 Volt.
Application: 60 Office, 30 Industrial Staff.
Weight: 13,0 Kg.(dry)
14,6 Kg.(full)

Glass Size = 165 ml

SUPAKWIK water heaters pty Ltd

supakwik.com

UB SERIES





UNDER BENCH CHILLER

8 Litres Per Hour
White

Product Code
UB6030

Page N° **31**

Included:
Chiller
350 kPa Pressure Limiting Valve
Pressure Relief Valve

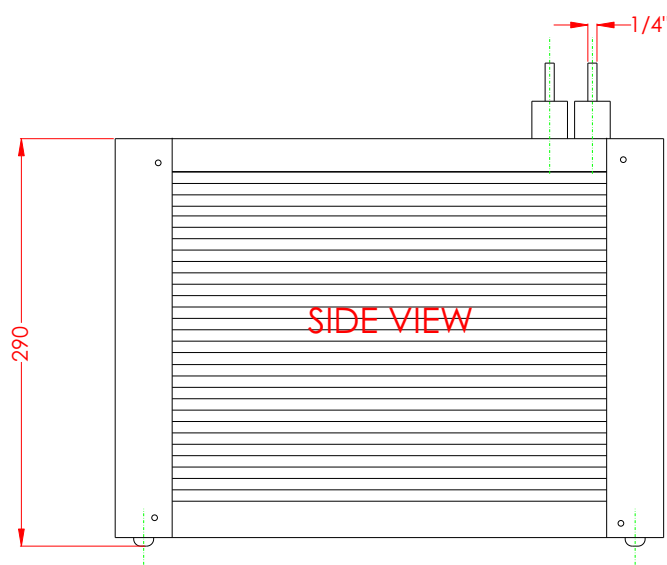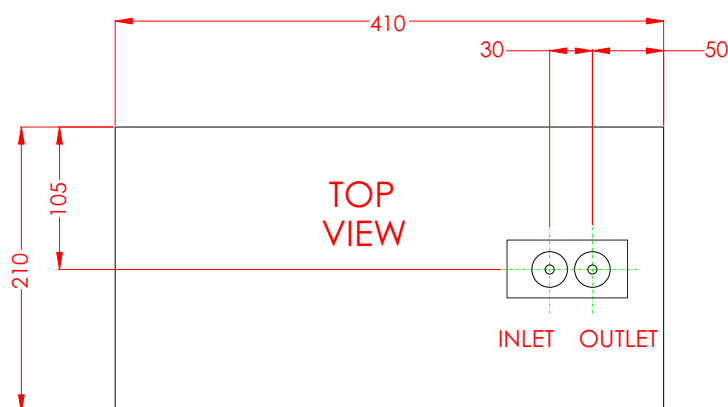

Chiller

The 350 kPa Pressure Limiting Valve supplied, must be installed to safe guard the Cooler.

The Chiller must always be installed level, with the inlet and outlet tubes facing up.

Technical Specifications

Nominal Capacity:	1,9 Litres
Recovery:	8 Litres per hour
Supply Rating:	0.75 Amps @ 240 Volt.
Application:	60 Office, 30 Industrial Staff.
Weight:	13,0 Kg.(dry) 14,6 Kg.(full)

Glass Size = 165 ml

SUPAKWIK water heaters pty Ltd

supakwik.com



Supaflush

Ceiling Mount - Battery Powered Water Saver Kit

Product Code


SFCBK

Page N° 32



Kit includes the following:

Sensor Assembly
2m Valve Cable
Latching Valve
Battery
1/2" Mini ball Valve
1/2" Compression Fittings

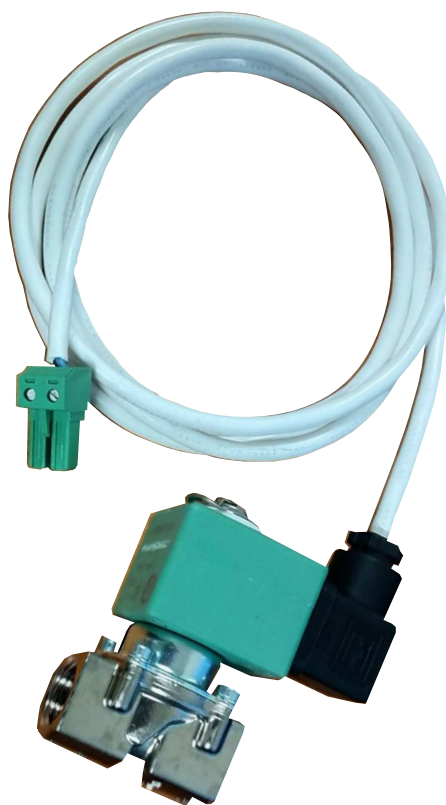

Supaflush

Battery cover removed for clarity

Technical Specifications

Application:	Automatic Urinal Flusher
Mounting:	Ceiling Mount
Mounting Aperture	105 mm Diameter
Battery Voltage:	9 Volt
Supply Fittings	1/2" BSP
Service Rating:	860 kPa.

SUPAKWIK water heaters pty ltd





Supaflush

Ceiling Mount - Mains Powered Water Saver Kit

Product Code


SFCMK

Page N° 33



Kit includes the following:

Sensor Assembly
2m Valve Cable
Latching Valve
Power Supply
1/2" Mini ball Valve
1/2" Compression Fittings

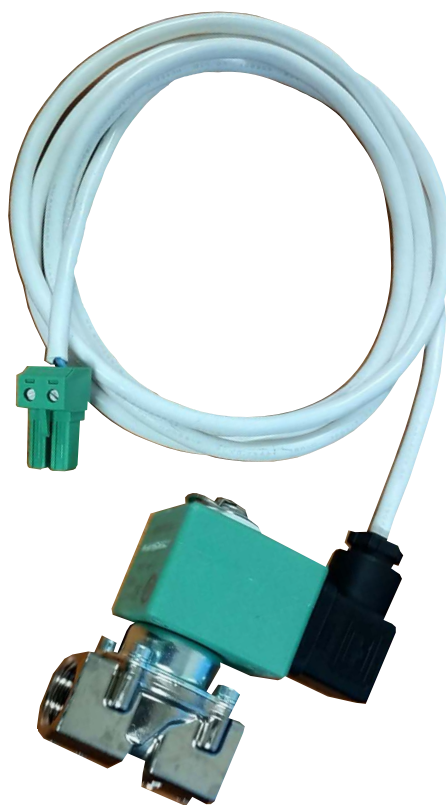

Supaflush

Battery cover removed for clarity

Technical Specifications

Application:	Automatic Urinal Flusher
Mounting:	Ceiling Mount
Mounting Aperture	105 mm Diameter
Supply Voltage:	9 Volt
Supply Fittings	1/2" BSP
Service Rating:	860 kPa.

SUPAKWIK water heaters pty ltd





Supaflush

Wall Mount - Battery Powered Water Saver Kit

Product Code



SFWBK

Page N° 34



Kit includes the following:

Sensor Assembly
2m Valve Cable
Latching Valve
Power Supply
1/2" Mini ball Valve
1/2" Compression Fittings

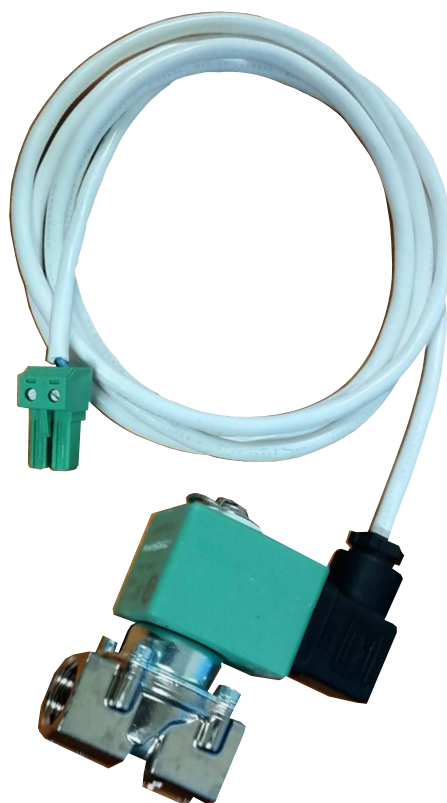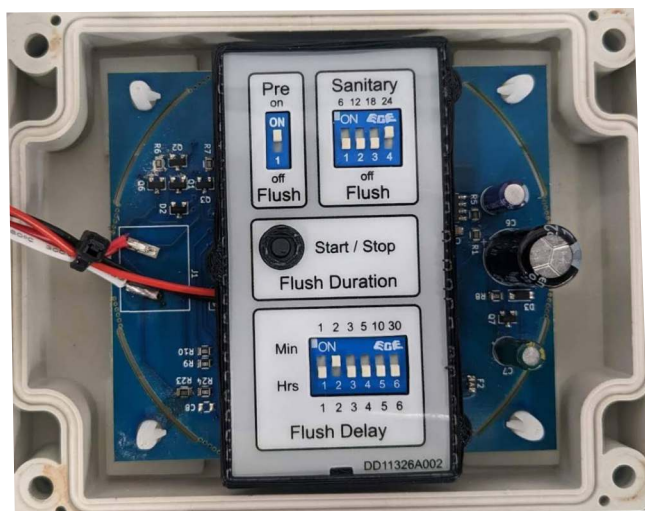

Supaflush

Battery cover removed for clarity

Technical Specifications

Application:	Automatic Urinal Flusher
Mounting:	Wall Mount
Mounting Aperture	
Battery Voltage:	9 Volt
Supply Fittings	1/2" BSP
Service Rating:	860 kPa.

SUPAKWIK water heaters pty ltd





Supaflush

Wall Mount - Mains Powered Water Saver Kit

Product Code


SFWMK

Page N° 35



Kit includes the following:

Sensor Assembly
2m Valve Cable
Latching Valve
Power Supply
1/2" Mini ball Valve
1/2" Compression Fittings

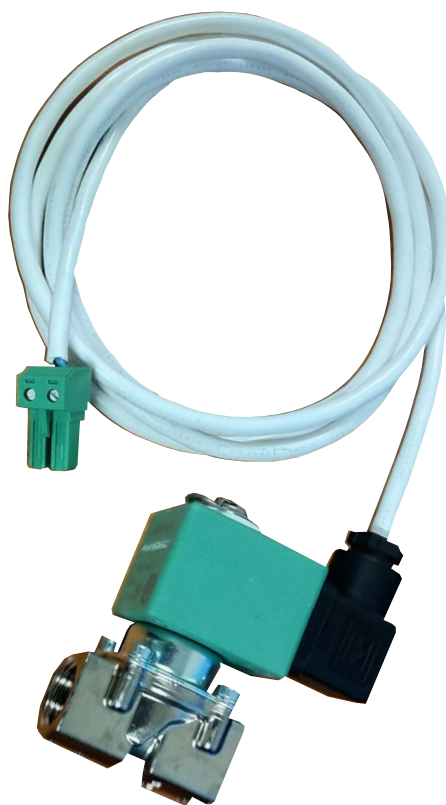

Supaflush

Battery cover removed for clarity

Technical Specifications

Application:	Automatic Urinal Flusher
Mounting:	Wall Mount
Mounting Aperture	
Supply Voltage:	9 Volt
Supply Fittings	1/2" BSP
Service Rating:	860 kPa.

SUPAKWIK water heaters pty ltd





AMBIENT TAP

1/2 Micron Filtration Kit

Product Code






Goose Neck Chrome ATGS

Page N° 36

Product Codes
for Alternate Taps

Goose Neck Long Chrome ATLS

Included:
Tap Assembly
Bayonet Filter Head Assy
1/2 Micron Filter Cartridge
Ball Valve
350 kPa Pressure Limiting Valve
2 Meters LLDPE Tubing
1/2" F x 1/4" Quick Connect Fitting

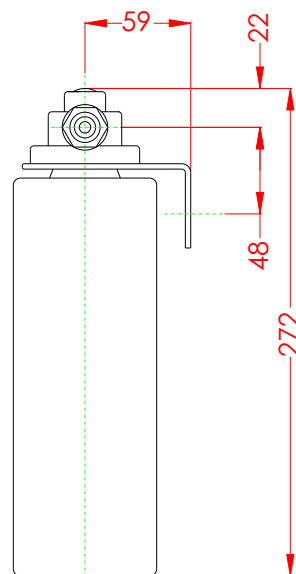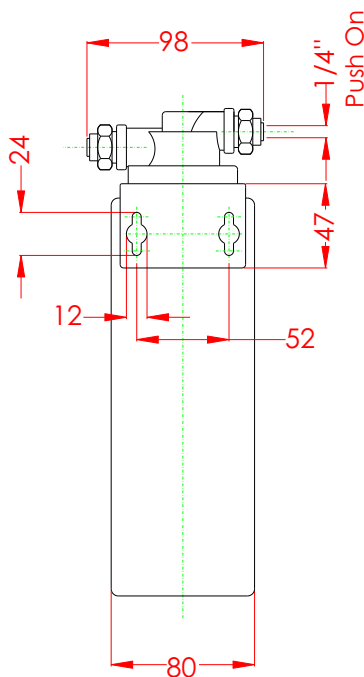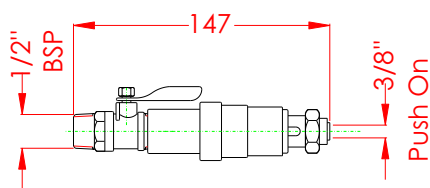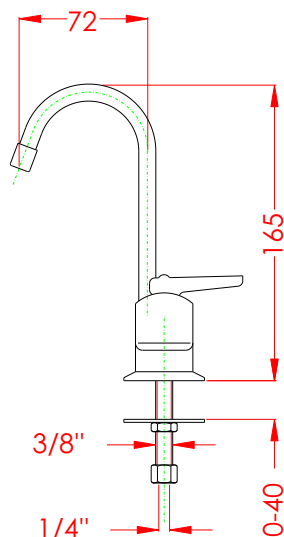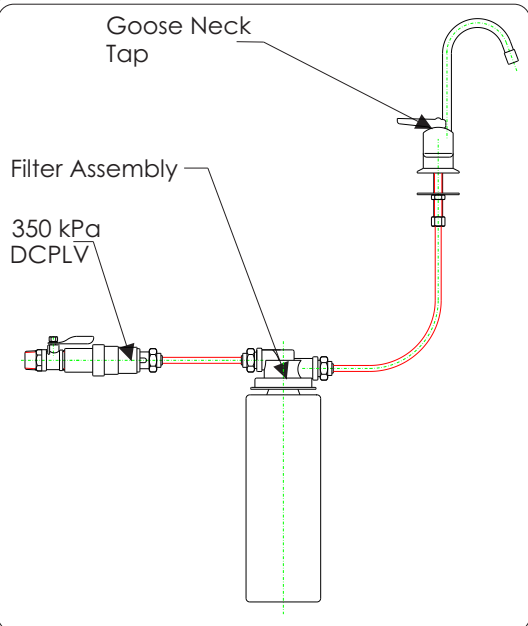

350 kPa Pressure Limiting Valve must be installed to safe guard filter.

AT SERIES

Technical Specifications

Application: Filtered Ambient Installation
Mounting: Counter Top
Supply Fittings: Ferruled 1/4" Tubing
Service Rating:

SUPAKWIK water heaters pty ltd

supakwik.com



AMBIENT TAP

1/2 Micron Filtration Kit



Product Code

Goose Neck Long Chrome ATLS




Page N° 37

Product Codes
for Alternate Taps

Goose Neck Chrome ATGS

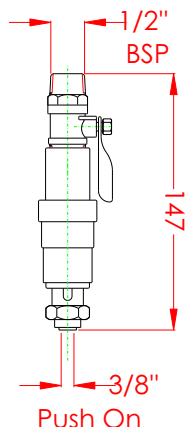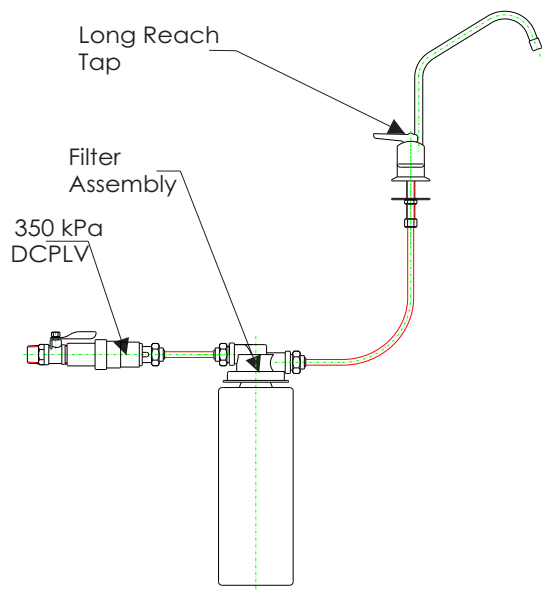

Included:
Tap Assembly
Bayonet Filter Head Assy
1/2 Micron Filter Cartridge
Ball Valve
350 kPa Pressure Limiting Valve
2 Meters LLDPE Tubing
1/2" F x 1/4" Quick Connect Fitting

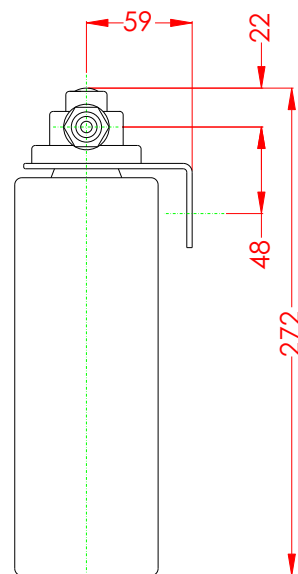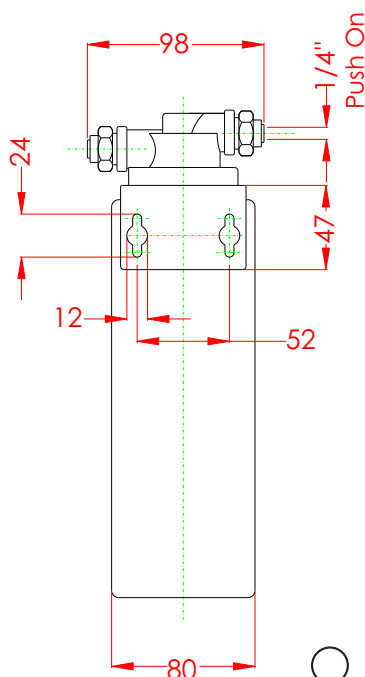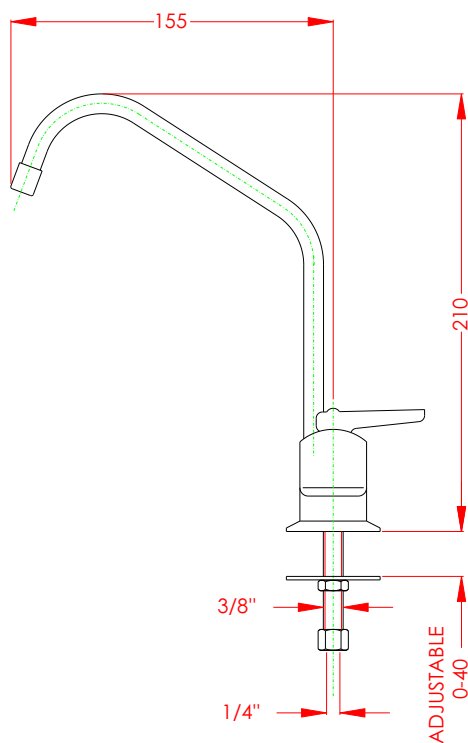

350 kPa Pressure Limiting Valve must be installed to safe guard filter.

Technical Specifications

Application:
Mounting:
Supply Fittings
Service Rating:

Filtered Ambient Installation
Counter Top
Ferruled 1/4" Tubing

SUPAKWIK water heaters pty ltd

supakwik.com

AT SERIES




TUNDISH

Nickel Plated - Straight G3/4"

Product Code

T18020

Page N° 38

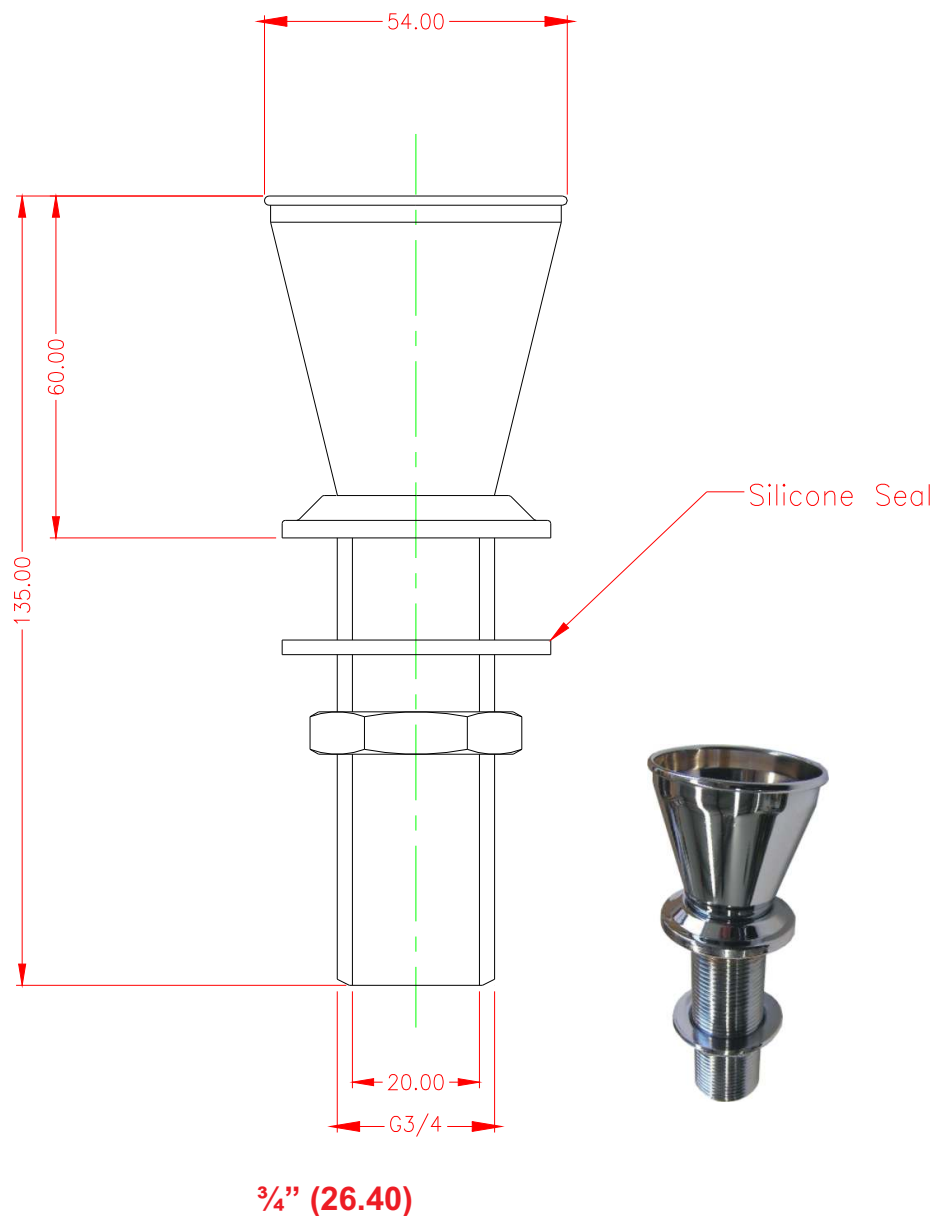

Tun Dish

Technical Specifications

This Tundish has been specifically designed for use with Boiling Water Dispensers.

This Tundish is rated to accommodate a maximum flow rate of 8 litres/minute.

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com




TUNDISH

Nickel Plated - Wall Mount G3/4"

Product Code

T09020

Page N° 39

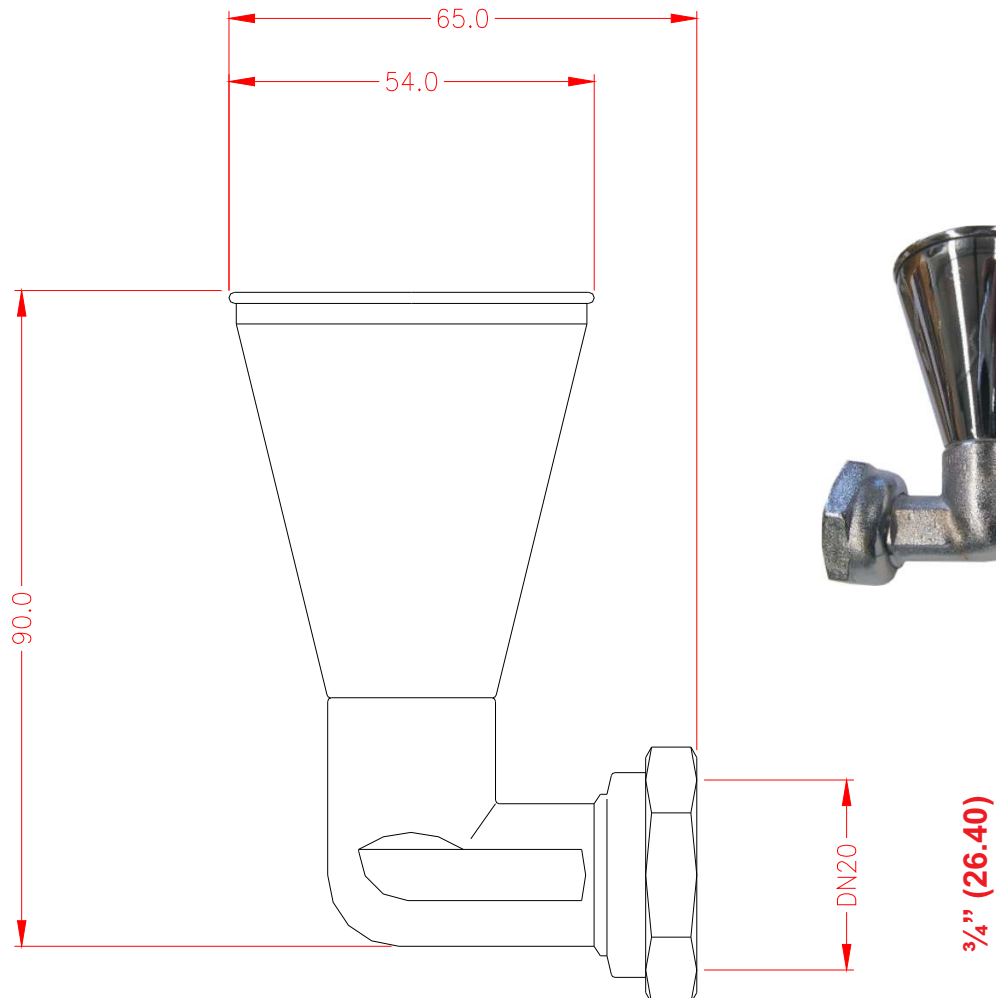

Tun Dish

Technical Specifications

This Tundish has been specifically designed for use with Boiling Water Dispensers.

This Tundish is rated to accommodate a maximum flow rate of 8 litres/minute.

Cup Size = 167 ml

SUPAKWIK water heaters pty ltd



supakwik.com



Filter Cartridge

5 Micron

Product Code
F02F

Page N° 40

FILTRATION



When Installing, allow a minimum clearance of 75mm below the filter cartridge to allow for easy cartridge replacement.

Technical Specifications

CARTRIDGE OPERATING PERAMETERS

Capacity: 11355 Litres.
Pressures: 850 kPa max. 70 kPa min.
Temperature: 2 -38°C
Flow Rate: 3.8 Litres / min

SUPAKWIK water heaters pty ltd

supakwik.com



Filter Cartridge

½ Micron

Product Code

F02S

Page N° 41



FILTRATION



When Installing, allow a minimum clearance of 75mm below the filter cartridge to allow for easy cartridge replacement.

Technical Specifications

CARTRIDGE OPERATING PERAMETERS

Capacity:	5000 Litres.
Pressures:	850 kPa max. 70 kPa min.
Temperature:	2 -38°C
Flow Rate:	3.8 Litres / min

SUPAKWIK water heaters pty ltd

supakwik.com

1/2 Micron - 1/2" BSP Fittings




CARTRIDGE & HEAD ASSY

5 Micron - 1/2" BSP Fittings

Product Code
FH1212F02F

Page N° 43

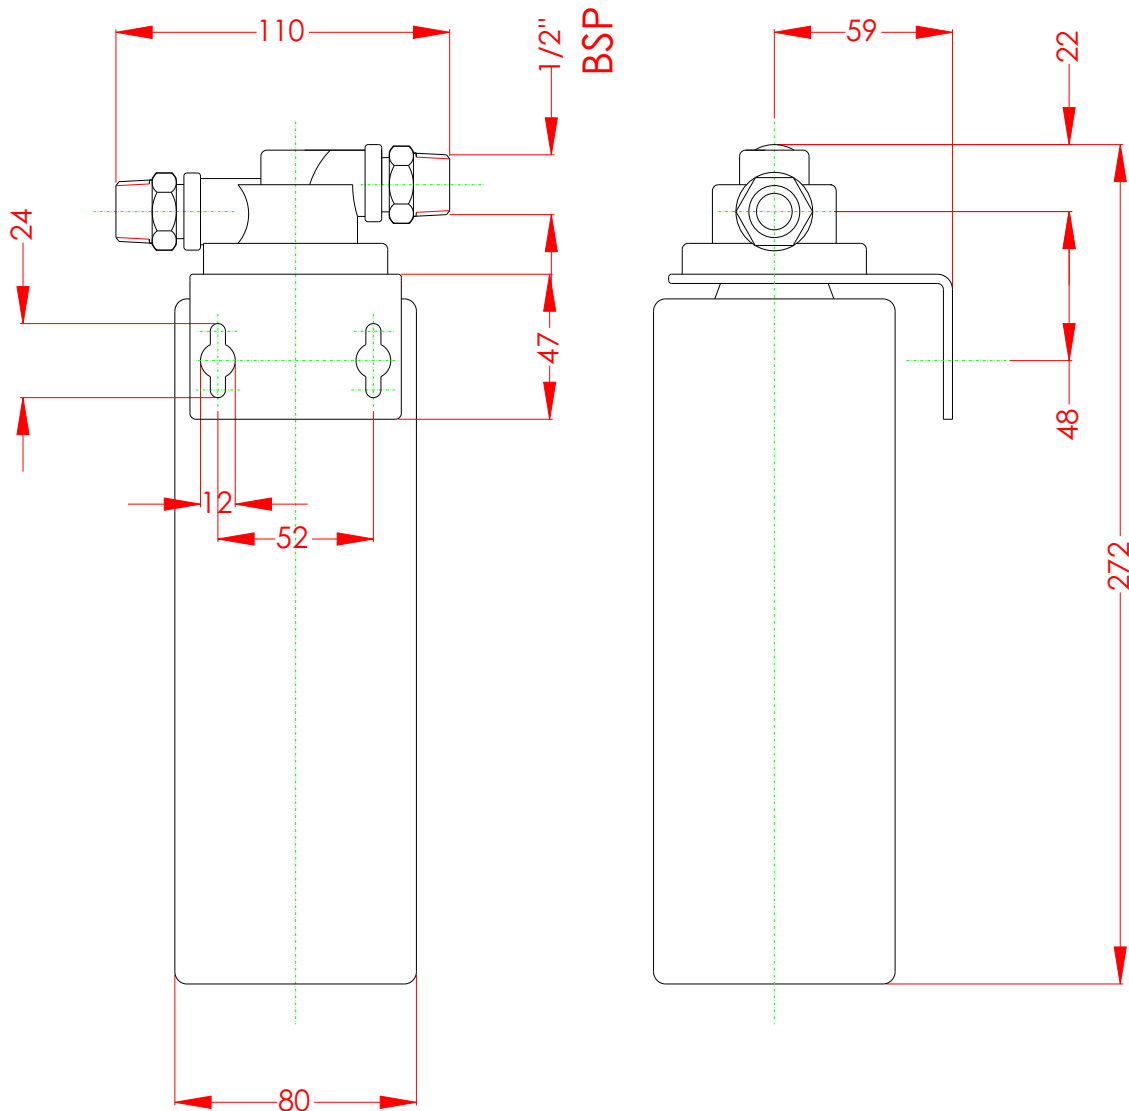

When Installing, allow a minimum clearance of 75mm below the filter cartridge to allow for easy cartridge replacement.

Accessories

Technical Specifications

CARTRIDGE PERFORMANCE RATING

Capacity: 11,250 Litres.

Pressures: 860 kPa max. 70 kPa min.

Temperature: 38°C max.

SUPAKWIK water heaters pty Ltd

supakwik.com




CARTRIDGE & HEAD ASSY

1/2 Micron - 1/4" Push Connect Fittings

Product Code
FH1414F02S

Page N° 44

Accessories

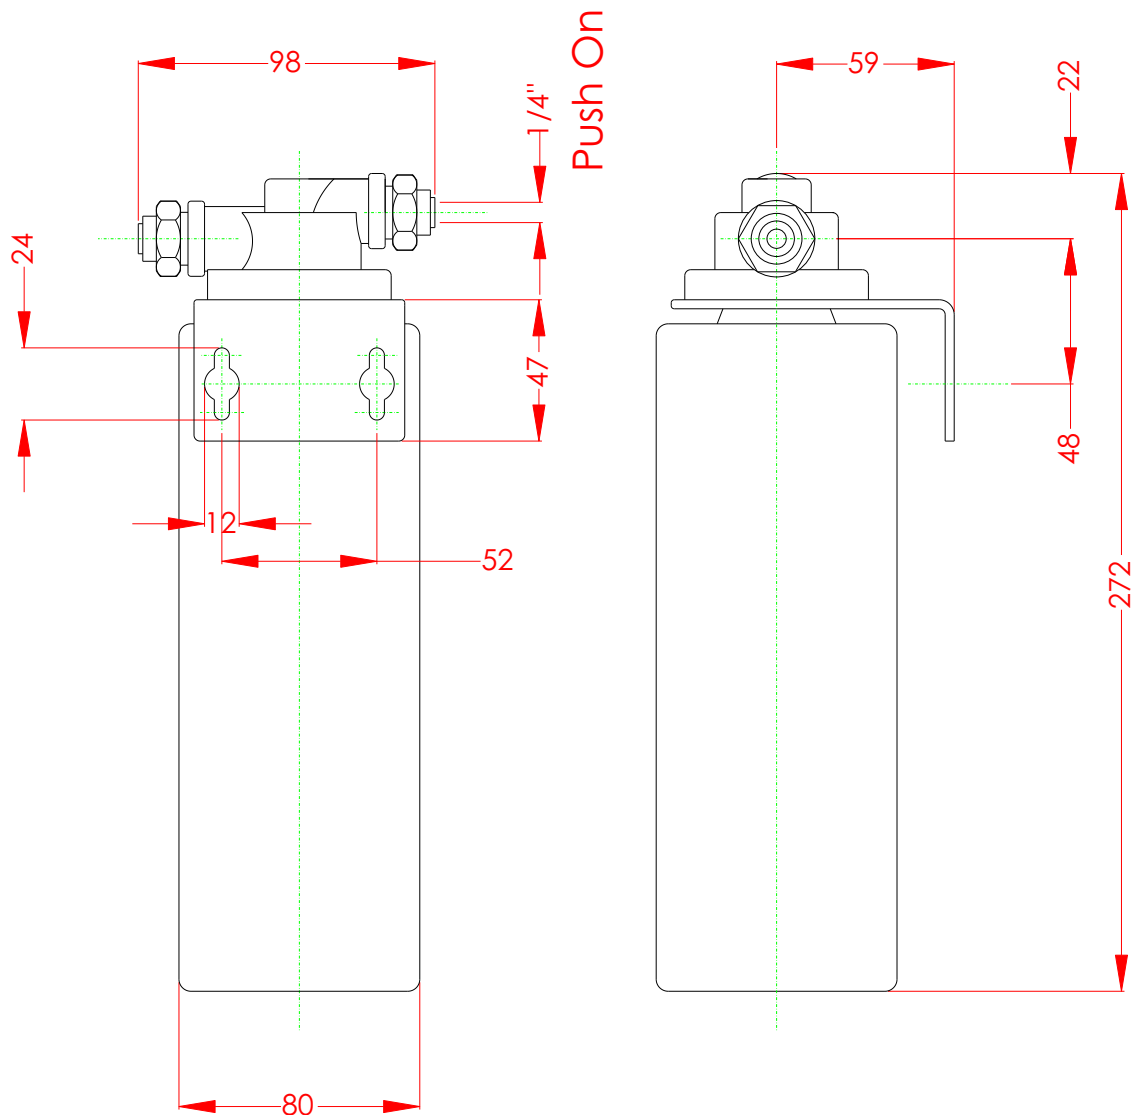

When Installing, allow a minimum clearance of 75mm below the filter cartridge to allow for easy cartridge replacement.

Technical Specifications

CARTRIDGE PERFORMANCE RATING

Capacity:	5000 Litres.
Pressures:	860 kPa max. 70 kPa min.
Temperature:	38°C max.

SUPAKWIK water heaters pty ltd

supakwik.com




CARTRIDGE & HEAD ASSY

5 Micron - 1/4" Push Connect Fittings

Product Code
FH1414F02F

Page N° 45

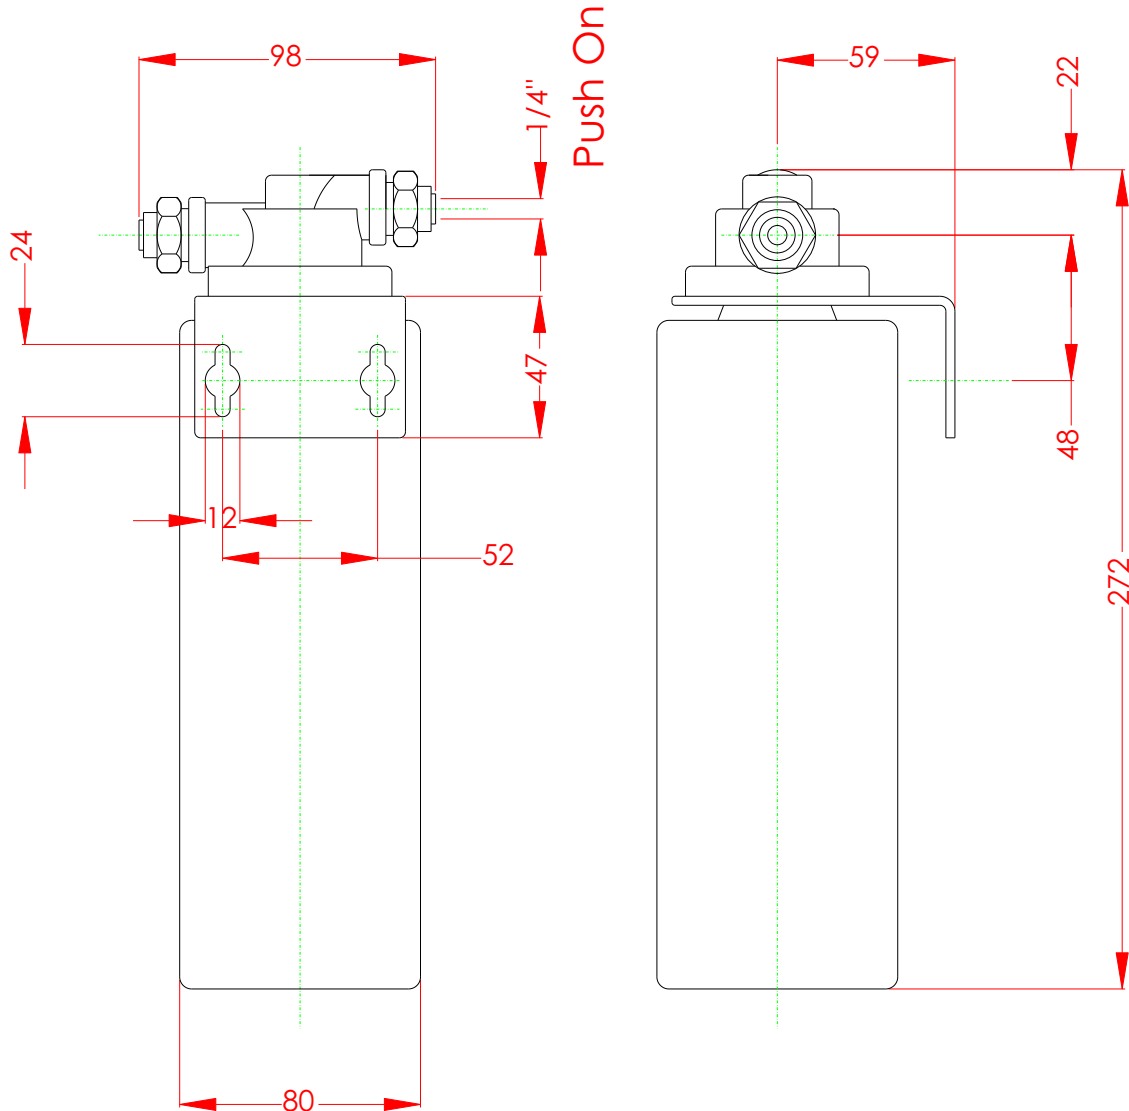

When Installing, allow a minimum clearance of 75mm below the filter cartridge to allow for easy cartridge replacement.

Accessories

Technical Specifications

CARTRIDGE PERFORMANCE RATING

Capacity:	11,250 Litres.
Pressures:	860 kPa max. 70 kPa min.
Temperature:	38°C max.

SUPAKWIK water heaters pty ltd

supakwik.com



AIR BREAK


DR Brass - Nickel Plated
1/2" Male x 1" Male

Product Code

AC1050

Page N° 46

Accessories

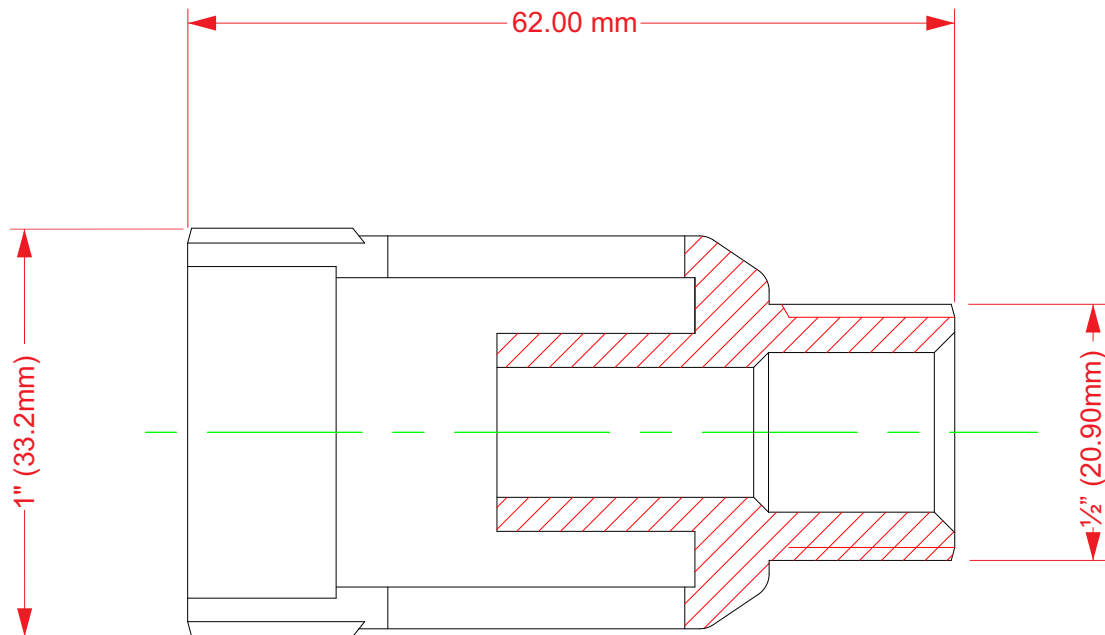

Technical Specifications

Supakwik Air Breaks are manufactured from DR Brass Nickel plated.

SUPAKWIK water heaters pty ltd



supakwik.com




AIR BREAK

Brass - Nickel Plated
1/2" Male x 1 1/4" Male


Product Code

AC1060

Page N° 47

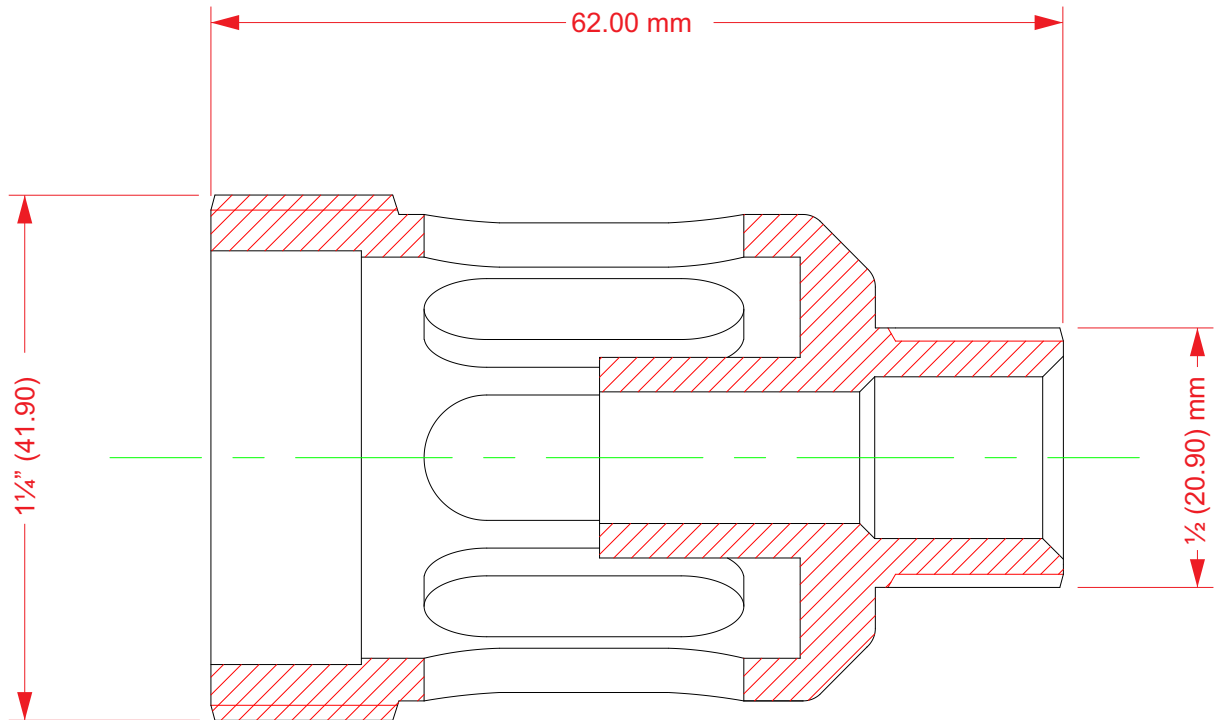

Accessories

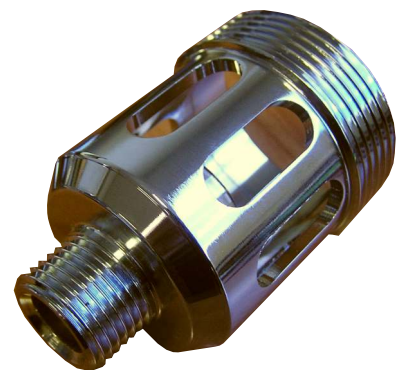

Technical Specifications

Supakwik Air Breaks are manufactured from DR Brass, Nickel plated.

SUPAKWIK water heaters pty ltd



supakwik.com



AIR BREAK



Brass - Nickel Plated
1/2" Male x 1 1/2" Male

Product Code

AC1070

Page N° 48

Accessories

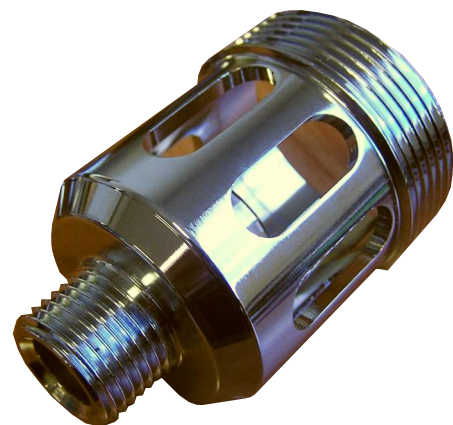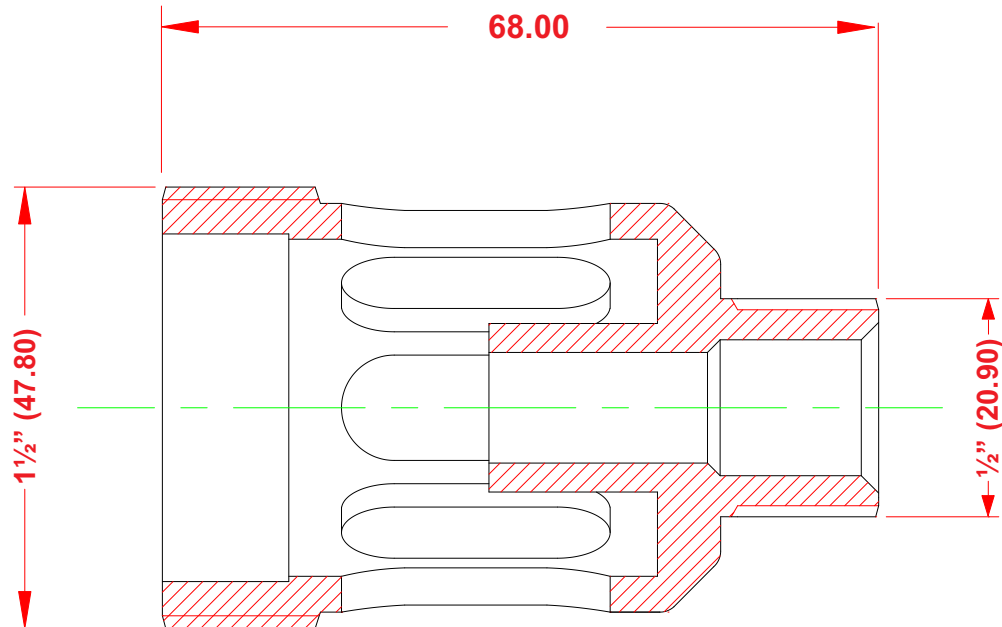

Technical Specifications

Supakwik Air Breaks are manufactured from DR Brass, Nickel plated.

SUPAKWIK water heaters pty ltd



supakwik.com




COUNTER TOP FONT

Glass, Black complete with 40mm Waste

Product Code

CTF-GB

Page N° 49

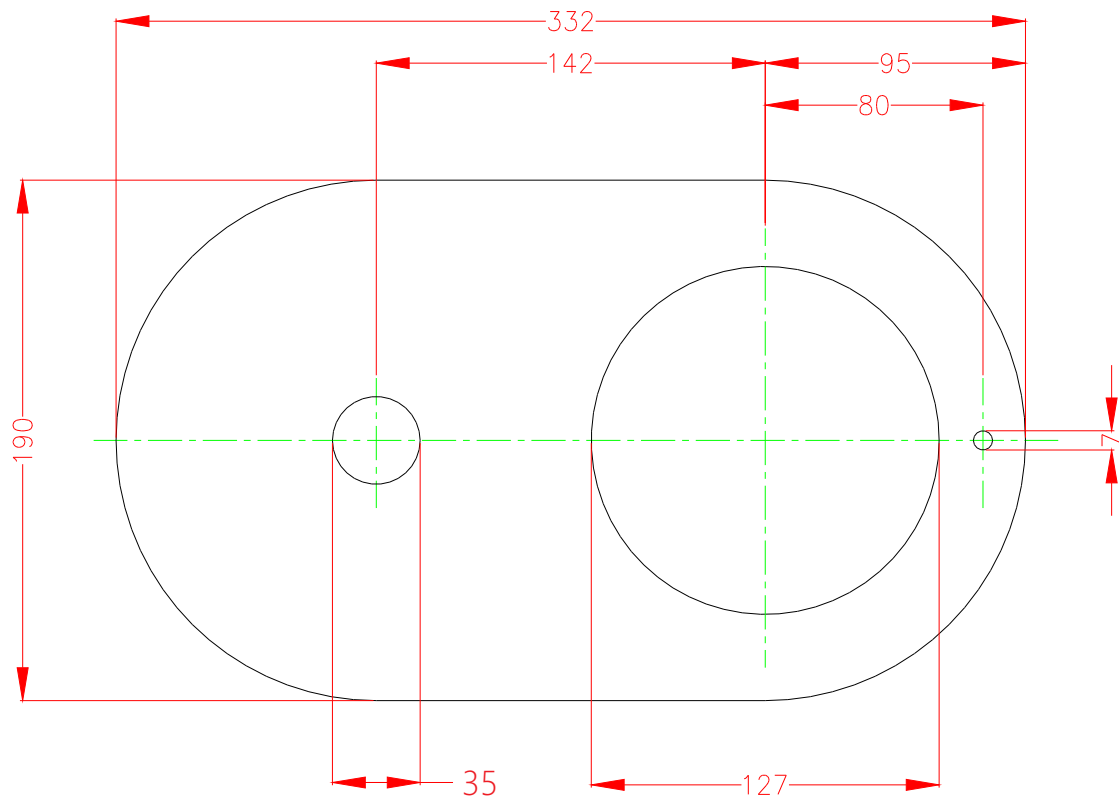

Accessories

Technical Specifications

Glass counter top font supplied complete with drain kit, silicone counter top seal and drilling template.

SUPAKWIK water heaters pty ltd

supakwik.com



COUNTER TOP FONT


Glass, White complete with 40mm Waste

Product Code

CTF-GW

Page N° 50

Accessories

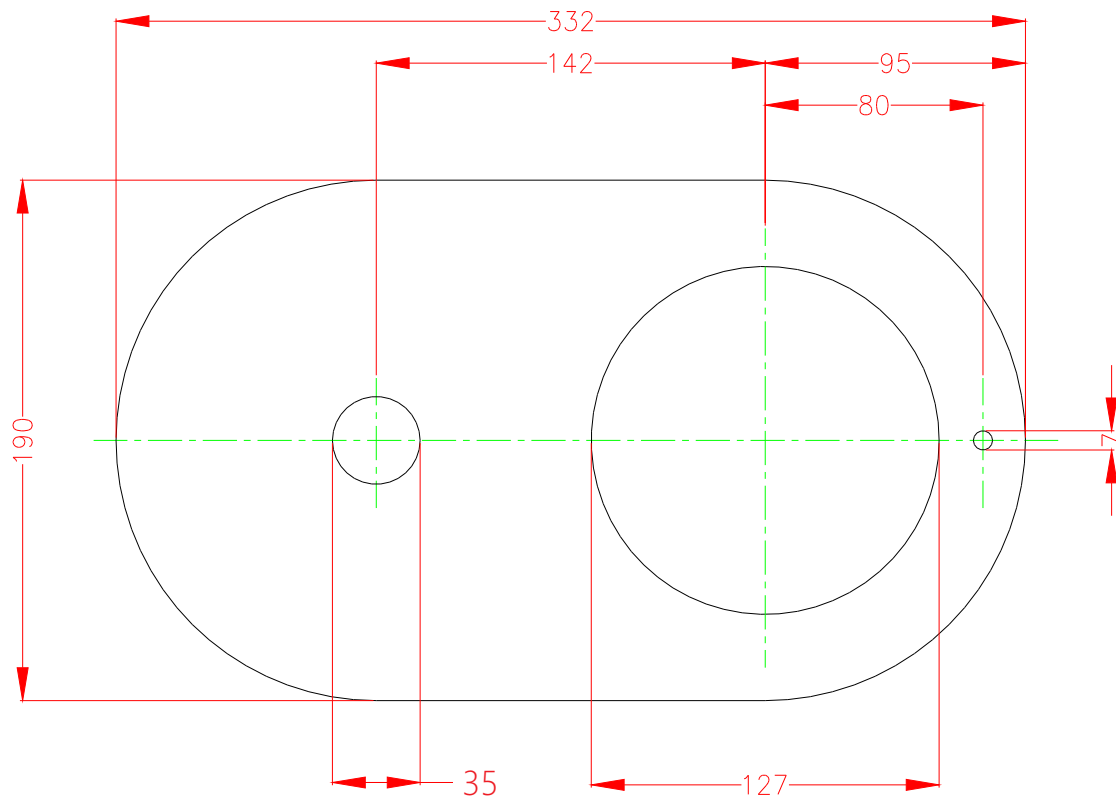

Technical Specifications

Glass counter top font supplied complete with drain kit, silicone counter top seal and drilling template.

SUPAKWIK water heaters pty ltd

supakwik.com





COUNTER TOP FONT

Chrome, Complete with Drain Kit

Product Code

CTF-CC

Page N° 51

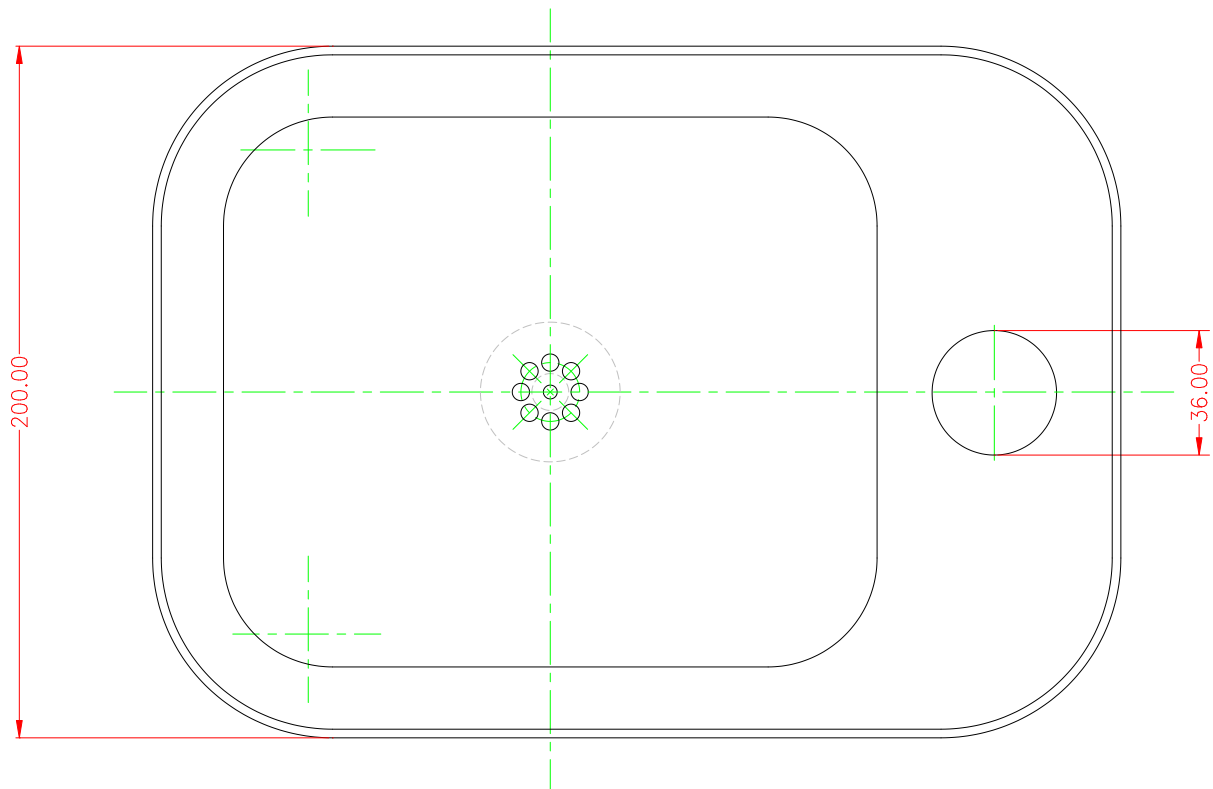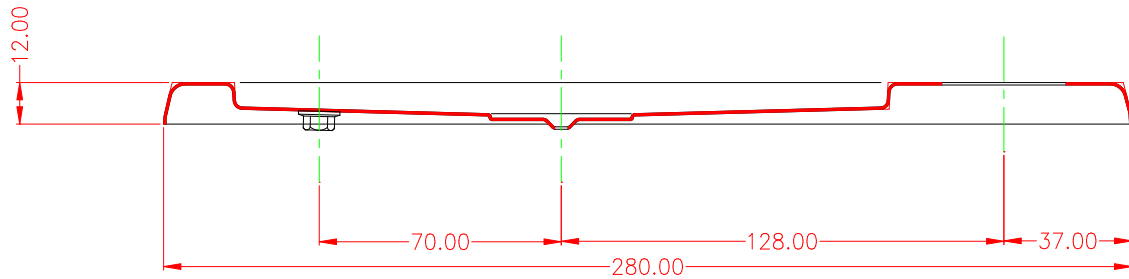

Accessories

Technical Specifications

Counter top font manufactured from stainless steel,
supplied complete with drain kit

SUPAKWIK water heaters pty ltd

supakwik.com



OVERSINK RANGE - SUPABOIL & KWIKBOIL SERIES

RP0008	High Level Probe, OS/US Series
RP0009	Level Probe Sleeve x 5
RP0018	Element Seal
RP0021	Tap Assy
RP0022	Solenoid Valve (Up to "F" Nov. 2016) 3/4"
RP0023	Controller
RP0024	Cordset
RP0025	Tube, Silicone, 1m
RP0030	Thermistor
RP0031	Seal Kit
RP0032	Tap Diaphragm
RP0033	Handle Assy
RP0034	Cap Seal Kit
RP0045	Element Assy, 2.4 kW, Bolt On, 20 Cup
RP0046	Element Assy, 2.4 kW, Bolt On, 38/160 Cup & Underbench
RP0048	Tap Surround - Kwikboil
RP0059	Solenoid Valve (From "G" Nov. 2016) 3/8"
RP0075	Controller M Series

UNDERSINK RANGE - SUPATAP SERIES

RP0053	Underbench Tap
RP0055	Controller 2-5 in 1
RP0008	High Level Probe, US/OS Series
RP0057	Low Level Probe, 200
RP0058	Boiling Pump - Brushed - White
RP0059	Solenoid Valve 3/8" - Heater
RP0060	Solenoid Valve 3/8" - Ambient/Chilled
RP0063	Pressure Limiting Valve - 350kPa
RP0065	Pump Silicon Tube - 440mm
RP0066	Silicone Tube - 80/100mm - Heater
RP0067	Push connect fitting Kit - 2 in 1
RP0068	Push connect fitting Kit - 3 in 1
RP0069	1/4" HDPE tube - 1 Metre
RP0070	Chiller Tube, 3 in 1 - 1/4" Copper
RP0071	Filtered Tube, 200/3 in 1 - 1/4" Copper
RP0072	Filtered Tube, 2 in 1 - 1/4" Copper
RP0073	O'Ring Seal Kit
RP0074	Switch
RP0076	Low Level Probe, 100
RP0077	Low Level Probe, 120
RP0078	Low Level Probe, 170
RP0079	Low Level Probe, 200
RP0104	Boiling Pump - Brushless - Black